


非常感谢您选购了我们AJAZZ黑爵AK873,这款产品具备各种酷炫功能与灯效,希望它能带给您全新的操作感受。更多操作可前往黑爵官网下载驱动。AJAZZ官网网址: <http://www.a-jazz.com/>

一、基本参数

产品品牌: **AJAZZ** 黑爵
产品型号: AK873
传输方式: USB有线+2.4G无线+5.0线蓝牙
接口类型: 键线分离式Type-C接口
产品尺寸: 356x130x35mm
产品重量: 1095g
锂电池: 2500mAh
外壳材质: ABS注塑
键帽材质: PBT热升华
线材长度: 1.6M
灯光效果: RGB,18种灯效
按键布局: 87键
矩阵: 全键无冲
支持系统: Windows Vista /7/8/10/11, MAC, Android

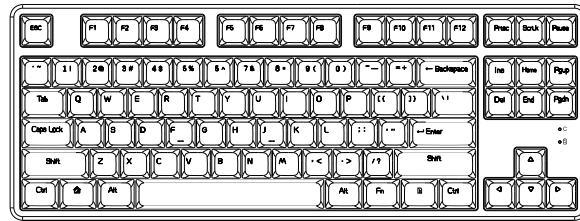

二、开关指示灯说明

指示灯 : 大小写指示灯;
指示灯 : 低电报警指示灯。(低电时红灯快闪,充电时红灯常亮,充满后熄灭)

开关功能

电源开关ON/OFF;
不管当前开关处于任何模式,接通有线电源即可为电池进行充电。

休眠机制

省电休眠: 键盘无按键操作5分钟后背光关闭,按任意按键唤醒键盘背光并回连蓝牙/2.4G;
深度休眠: 键盘无按键操作30分钟后深度待机,蓝牙/2.4G断开且休眠,按任意按键唤醒键盘背光并回连蓝牙/2.4G。

三、模式连接说明

1、蓝牙模式连接: FN+Q / W / E

蓝牙名称: AK873 BT5.0;

长按FN+Q (或W或E) 组合键3秒配对, Q键灯光 (蓝光) 快速闪烁进入对码模式, 连接成功, 灯光恢复到正常灯效;
短按FN+Q/W/E组合键切换蓝牙通道, 配对的Q/W/E按键灯光慢闪, 回连成功, 灯光恢复到正常灯效。

2、2.4G模式连接: FN+R

长按FN+R进入2.4G强对码, R键灯光 (绿光) 快速闪烁进入对码模式, 对码成功灯光恢复到默认状态。(出厂已配对, 用户无需对码)

3、有线模式连接: FN+TAB

FN+TAB切换到有线模式, 背光闪烁三次表示。

四、灯光模式说明

FN+\ | 灯效切换, 18种灯效依次循环:

随波逐流 (出厂默认) / 彩云纷飞 / 峰回路转 / 光之审判 / 常亮 / 踏雪无痕 / 泛起涟漪 / 奔逸绝尘 / 暗流涌动 / 百花争艳 / 流星赶月 / 大鹏展翅 / 厚积薄发 / 落雨纷纷 / 左右逢源 / 众志成城 / 速度激情

FN+11、2@、3#可自定义三组游戏灯效

FN+11: 默认FPS模式—W / A / S / D / ↑ / ↓ / ← / →

FN+2@: 默认LOL模式—Q / W / E / R / D / G / F / B / V / L-Ctrl / L-Alt / Tab / Space / 1-6 / Esc

FN+3#: 默认37键办公模式: A-Z 26个英文字母 / [] / ; ' / . / , / / / ↑ / ↓ / ← / →

FN+~: 针对以上三个游戏模式灯光效果选择其中一组, 按FN+~键进行录制灯光模式, 录制时按一次按键为一种颜色, 共8种颜色, 再按一次关灯, 录制完后, 再FN+~键保存

FN+↑: 灯光亮度+ (五档), 极限时背光闪烁3次表示

FN+↓: 灯光亮度- (五档), 极限时背光关闭

FN+←: 动态灯光方向切换

FN+→: 切换背光颜色

FN+~: 灯光速度- (五档), 极限时背光闪烁3次表示

FN+=: 灯光速度+ (五档), 极限时背光闪烁3次表示

五、按键复合功能说明

FN+F1: 多媒体播放器

FN+F2: 音量减小

FN+F3: 音量增加

FN+F4: 静音

FN+F5: 停止播放

FN+F6: 上一曲

FN+F7: 播放/暂停

FN+F8: 下一曲

FN+F9: 邮件

FN+F10: 浏览器

FN+F11: 我的电脑

FN+F12: 计算器

FN+Left WIN: 锁住左边窗口功能 (win键灯光颜色变红光表示锁定, 解锁后恢复正常灯效)

FN+空格键: 长按3秒-5秒键盘灯闪烁3下, 清除灯效和蓝牙设备连接信息、恢复出厂设置

FN+X: 灯光打开/灯光关闭

FN+A: 切换Mac系统键位

FN+S: 切换Windows系统键位 (出厂默认)

AJAZZ® × NACODEX™

AK873蓝牙三模机械键盘
BT three-modes mechanical keyboard

使用说明书
User Manual

产品质保 (Product Warranty)

感谢您对黑爵产品的信任与支持, 为了让您放心使用本产品, 更好地保障您的权益, 我公司将严格遵守并执行相关规定, 实行售后服务。

- 1、服务有效期: 自购买之日起质量保证12个月
- 2、服务内容: 按微型计算机商品维修更换退货责任规定进行服务
- 3、不属于服务范围:

- a. 已经超出有效服务或免费维修期的;
- b. 未按照正确使用说明使用、维护、保管导致故障或损坏的;
- c. 非本司授权维修机构维修导致的故障或损坏;
- d. 质保卡上无经销商资料及盖章之产品;
- e. 擅自涂改三包凭证内容的;
- f. 由于不可抗力 (如自然灾害等) 原因造成产品之不良;
- g. 人为因素导致产品不良 (如操作失误、磕碰、输入不合适电压等);
- h. 其他非产品设计、技术、制造、质量等问题导致的故障或损坏。

质保卡 (Warranty Card)

产品型号: _____

购买日期: _____

客户姓名: _____

联系电话: _____

联系地址: _____

- 本凭证为黑爵产品售后服务的重要依据, 请您妥善保管。
- 任何产品问题, 可扫码咨询微信公众号小编。



关注微信公众号



关注抖音号

制造商: 深圳市黑爵同创电子科技有限公司
地址: 深圳市光明区公明街道马田北路102号A栋2楼
电话: 86-0755-2740 7340
执行标准号: GB/T 14081-2010

Thank you very much for purchasing our AJAZZ AK873. This product has various cool functions and lighting effects. I hope it can bring you a new operating experience.

1. Product Specifications

Brand: AJAZZ

Model: AK873

Transmission Method: USB wired+2.4G wireless+5.0 Bluetooth

Interface Type: Type-C

Product Size: 356x130x35mm

Product Weight: 1095g

Lithium Battery: 2500mAh

Shell Material: ABS injection

Keycap Material: PBT dye sublimation keycaps


Wire Length: 1.6M

Lighting Effects: RGB, 18 kinds of lighting effects

Key Layout: 87 keys

Anti-Ghosting: 87 keys

Compatible System: Windows Vista/7/8/10/11, MAC, Android

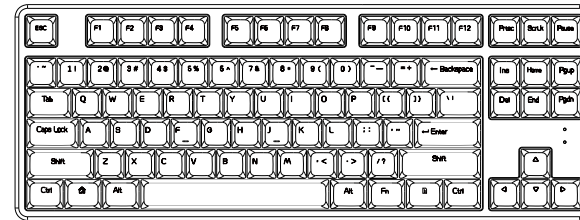

2.The Switch Indicator Light Description

Indicator Light

Indicator Light : Upper and lower case indicator light;

Indicator Light : Low battery alarm indicator. (The red light flashes quickly when the battery is low, the red light is always on when charging, and turns off when fully charged)

Power Switch

Power Switch ON/OFF

The battery can be charged by connecting to wired power regardless of the current switch mode.

Sleep Mode

Power saving sleep mode: after 5 minutes of keyboard keyless operation, the backlight will be turned off, press any key to wake up the keyboard backlight and connect Bluetooth/2.4G back;

Deep sleep mode: after 30 minutes of keyboard keyless operation, the keyboard is in deep standby mode. Bluetooth/2.4G is disconnected and hibernates. Press any key to wake up the keyboard backlight and connect Bluetooth/2.4G back.

3. Mode Connection Description

①. Bluetooth Mode Connection: FN+Q / W / E

Bluetooth Name: AK873 BT5.0;

Long press FN+Q/W/E key combination for 3 seconds to pair, Q key light (blue light) flash quickly into code mode, The connection is successful, and the light is restored to normal.

Short press FN+Q/W/E combination key to switch Bluetooth channel. The paired Q/W/E key light blinks slowly, indicating that the connection is successful light return to normal light effect.

②. 2.4G Mode Connection: FN+R

Long press FN+R to enter 2.4G strong code matching, R key light (green light) quickly flashes to enter the code matching mode, the light is restored to the default state.

③. Wired Mode Connection: FN+TAB

FN+TAB switches to wired mode, and the backlight flashes three times.

4.Description of Lighting Mode

FN+\ | Light effect switching, 18 kinds of light effects cycle in tur

FN+11, 2@, 3# can customize three sets of game lighting effects:

FN+11: Default FPS Mode—W / A / S / D / ↑ / ↓ / ← / →

FN+2@: Default LOL mode—Q / W / E / R / D / G / F / B / V / L-Ctrl / L-Alt / Tab / Space / 1-6 / Esc

FN+3#: Default 37-key office mode: A-Z 26 English letters / [] / ; ' / . / , / / / ↑ / ↓ / ← / →

FN+~: Select one group according to the lighting effect of the above three game modes, and press FN+~ key to record the lighting mode. Press the button once during recording to change one color, a total of 8 colors. Press again to turn off the light, and then press FN+~ key to save after recording

FN+↑: The backlight flashes 3 times when the light brightness + (five gears) limit is indicated

FN+↓: Light brightness - (five gears), the backlight is turned off at the limit

FN+←: Dynamic light direction switching

FN+→: Toggle backlight color

FN+~: Light speed - (five gears) when the backlight flashes 3 times at the limit

FN+=: Light speed + (five gears) when the backlight flashes 3 times at the limit.

5. Description of Key Compound Functions

FN+F1: Multimedia Player

FN+F2: Volume Down

FN+F3: Volume Up

FN+F4: Mute

FN+F5: Stop Playing

FN+F6: Previous Song

FN+F7: Play/Pause

FN+F8: Next Song

FN+F9: Mail

FN+F10: Browser

FN+F11: My Computer

FN+F12: Calculator

FN+Left WIN: Lock the left window function (Win lock light, the win key light flashes to indicate lock, and the normal light effect will be restored after unlocking)

FN+ space bar: Hold down the key for 3-5 seconds to restore default Settings

FN+X: turn off/on the backlight

FN + A: Mac

FN+S: Windows (default)