


87Keys V2 series RGB USB Wired / USB+Bluetooth 2 mode

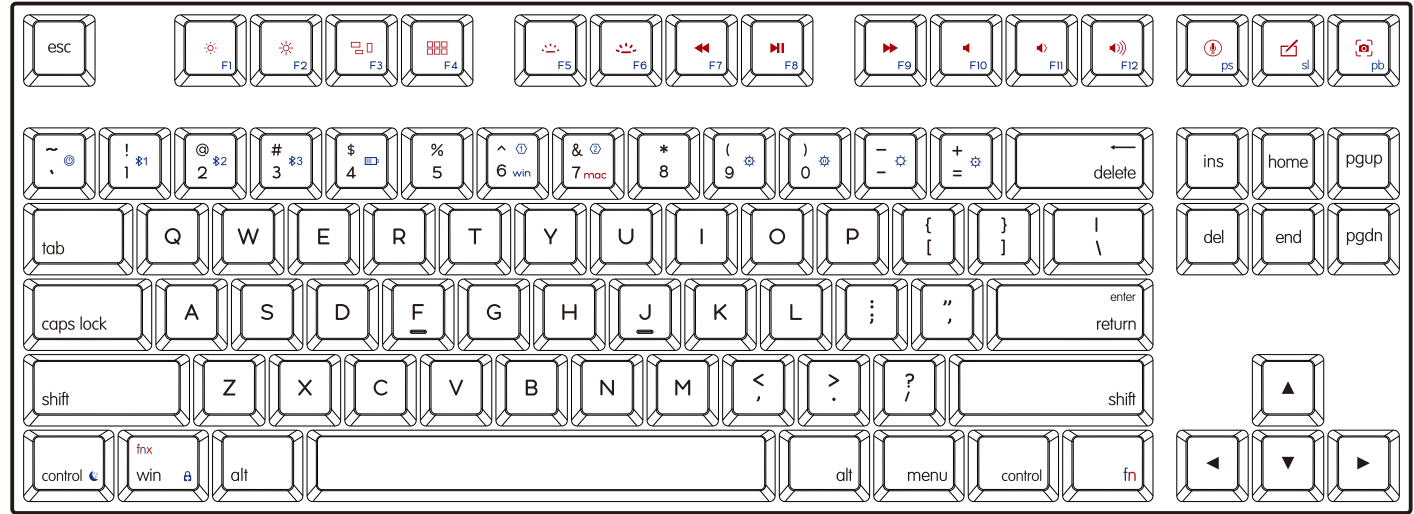

fn tips: Unlock/Lock the WIN key, prevent windows start pop-ups in the game.

fn tips: fn+space ON/OFF the BT mode, link to USB mode.

Bluetooth condition: 1L, 2@, 3# one of blue led is flashing, the keyboard is connecting the BT equipment.

fn tips: If you are not sure which mode the keyboard is in now, press fn key and observe what LED is on to confirm.

fn function description (Double-click FN to light FN's white LED, FN function is held, click FN again to escape from holding status).

Define mode

Key	Function
Standard mode	Standard mode, all buttons can not be user-defined. User can customize your own personality keyboard by the following 4 modes. On-board mode 1/2/3 is strongly recommended. (Note: In the custom mode, except FN key, other keys can be redefined key values, some of the FN + "x" function can be also modified, except the backlight, bluetooth and system control. The FN button can not be moved, but user can define your own FNx at any key in the custom mode.
FN + 6^ Onboard mode1 WIN mode	FN + 6^, onboard mode layer 1. "6^" lights white LED. no need to run and connect the driver. The keyboard works in the custom key functions and user can modify the key functions and macro Settings by the driver and these Settings can be downloaded and saved to the keyboard. The reference setting: WIN mode setting to realize the habitual operation of win users. Press FN+6^ again, back to the standard mode.
FN + 7& Onboard mode2 MAC OS mode	FN + 7&, onboard mode layer 2. "7&" lights white LED. The reference Setting: keyboard of MAC OS, the "control.option.command" key will be in the original position, user can modify the Settings by the driver, download and save to the keyboard, no need to run and connect the driver when use the Mac's function settings. Press FN + 7& again, back to the standard mode.
Driver mode	Drive mode: Keyboard needs to be run and connected the driver in USB wired mode when realizes key function and light effects, some special function(for example you may assign a macro of more than 32 bytes to a key in the driver mode while it's unavailable in the onboard mode layer) You must need keep the driver running and the keyboard connect with the driver.
FNx setting Onboard mode3	FNx setting: If you don't like the FN position and FN combination key function, you can set your own FNx position and FNx combination key function, some special function keys, or combination keys, or macro keys, these settings of this mode can be called by the FNx key in layer1&layer2, all settings in these mode can be modified and saved to the keyboard.

Backlight settings (Can not modify)

Key	Function
FN + 0	Light effect pause/play
FN + 9(Backlight ON/OFF
FN + ~-	Backlight mode 1-5 (Can modify)
FN + +=	Backlight mode 6-9
FN + ↓	Backlight brightness -
FN + ↑	Backlight brightness +
FN + ←	Backlight Effect Speed -
FN + →	Backlight Effect Speed +

Bluetooth settings (Only for bluetooth mode, can not modify)

Key	Function
FN + Space	Bluetooth ON/OFF switch Link to USB mode or the last BT equipment.
FN + 1!	Long press: The red/green LED of 1! keycap will flash. The #1 bluetooth equipment can be paired. Press: The keyboard will connect the #1 BT equipment or disconnect.
FN + 2@	Long press: The red/green LED of 2@keycap will flash. The #2 bluetooth equipment can be paired. Press: The keyboard will connect the #2 BT equipment or disconnect.
FN + 3#	Long press: The red/green LED of 3# keycap will flash. The #3 bluetooth equipment can be paired. Press: The keyboard will connect the #3 BT equipment or disconnect.

Note: If the Bluetooth pairing timed out or failed, please re-pair; if the bluetooth pairing is successful on the equipment, but the keyboard can not work still, please delete this keyboard in the Bluetooth list, Turn off bluetooth of your PC or Mobile, restart the keyboard, and re-pair.

System Control (Cannot modify)

FN + @	Mechanical dual model series long press for 3 seconds to on/off the keyboard.
FN + 4\$	On/Off the charging indicator, low voltage alarm, the wired version does not have this function.
FN + control	Keyboard's sleep time setting, while LED on F10: never sleep, F1: 5minutes, F2: 10minutes,.....F9: 45minutes to sleep.


FN function (Reference Settings, can be modified by driver)

Key	Mac mode function	Win mode function
F1	Screen brightness - for Mac	F1
F2	Screen brightness + for Mac	F2
F3	for Mac	F3
F4	for Mac	F4
F5	Backlight brightness - for Mac	F5
F6	Backlight brightness + for Mac	F6
F7	Previous	F7
F8	Play/Pause	F8
F9	Next	F9
F10	Mute	F10
F11	Volume -	F11
F12	Volume +	F12
⌘	One click call Siri for Mac	Print Screen
⌘	One click call handwriting for Mac	Scroll Lock
⌘	Screenstop for Mac	Pause Break
FN + delete	delete	delete
FN + Win	Lock/Unlock Win key	Lock/Unlock Win key

From The community, For The community!

© FCC © RoHS

87键 V2系列RGB USB有线键盘/USB+蓝牙双模键盘

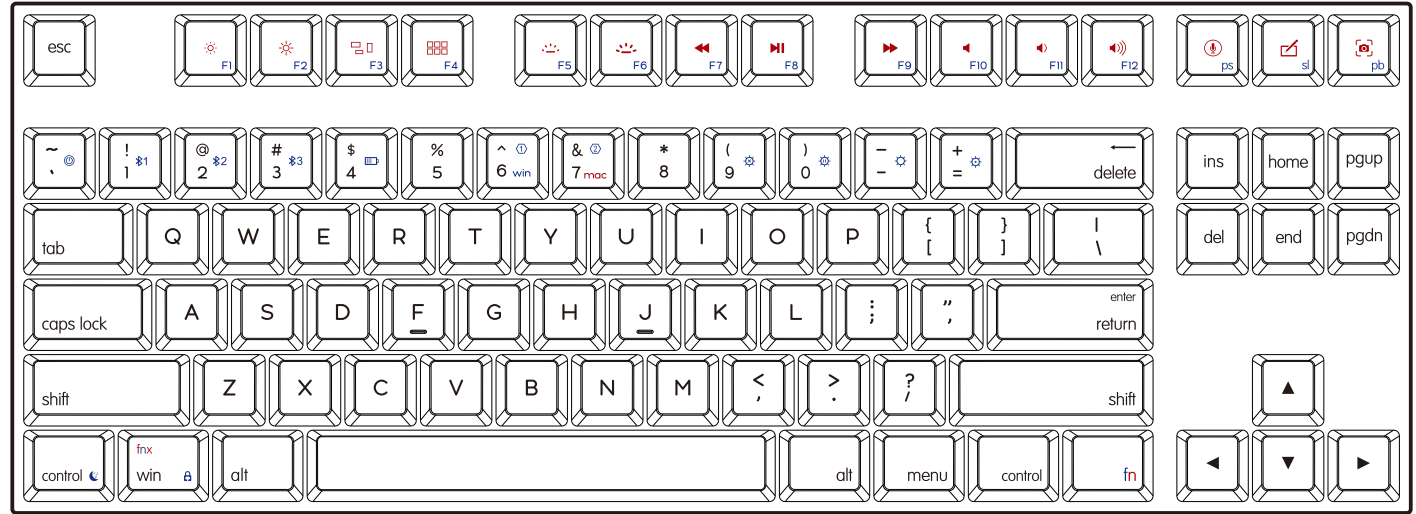

fn妙用小技巧: 快速锁定/解锁Win菜单, 防止游戏中误触发。

fn妙用小技巧: fn + 空格键快速关闭蓝牙搜索和蓝牙连接, 键盘切换到 USB 有线模式。

蓝牙状态说明: 1L, 2@, 3# 下一蓝灯闪烁表示搜索蓝牙设备, 蓝灯常亮表示键盘正处在蓝牙连接模式中。

fn妙用小技巧: 如果你无法确定键盘处在哪种模式, 按下fn观察什么灯亮起, 以确定键盘所处的模式状态。

fn 功能说明 (fn双击保持功能, fn下白灯亮, 单击释放)

自定义模式说明

按键	功能
标准模式	标准模式下, 所有按键不支持用户自定义, 用户可通过下列4种自定义模式来进行自定义键盘按键和组合按键功能, 强烈推荐用户使用板载模式1/2/3来定义自己的专属个性键值。(备注: 自定义模式下除FN键外, 其他按键都可以被重新定义键值, 部分FN组合功能也可以被修改, 键值关于灯效控制, 蓝牙和系统控制的FN组合键不能被修改, FN按键不能被移动, 但是用户可以在键盘的任意位置自定义自己的FNx)。
FN + 6^ 板载模式1 Win 模式	FN+6^ 用户自定义模式1, 6^下白灯亮起, 无需打开和连接驱动程序执行用户自定义的按键功能, 用户可以通过驱动程序修改本模式下的按键功能和宏定义设置, 并可下载保存到键盘本地, 出厂参考设置: Win模式设置, 实现Win用户的习惯操作, 再按FN+6^退出到标准模式。
FN + 7& 板载模式2 MAC OS模式	FN+7&, 用户自定义模式2, 7&下白灯亮起, 出厂参考设置: MAC OS设置, 实现MAC键盘的习惯操作, 并能通过驱动程序修改设置并下载保存到键盘本地, 使用时无需打开连接驱动程序实现预先设置的功能, 再按FN+7&退出到标准模式。
驱动模式	驱动模式: 用户必须打开驱动程序, 用USB有线模式连接键盘, 此时键盘实现驱动程序所设置的按键功能和灯效, 尤其是一些板载模式无法实现的特别功能和灯效, 比如: 板载模式下单个宏只能保存最多32字节, 驱动模式下用户可以设置更长的宏定义, 关闭驱动程序, 将无法实现本模式的功能。
FNx 设置 板载模式3	FNx设置: 如果用户不喜欢键盘出厂设置好的FN位置和FN组合功能, 用户可以设置自己喜欢的FNx位置和FN组合按键功能, 可设置一些特殊功能键, 或者组合键, 或者宏定义键, 在用户自定义的板载模式3查看板载模式被使用, 本模式所有设置可以修改并下载到键盘。

灯光控制 (固定设置 不可更改)

按键	功能
FN + 0	灯效暂停/播放
FN + 9(背光开关ON/OFF
FN + ~-	背光模式 1-5 (可通过驱动程序更改灯效)
FN + +=	背光模式 6-9
FN + ↓	背光亮度 -
FN + ↑	背光亮度 +
FN + ←	背光速度 -
FN + →	背光速度 +

蓝牙控制 (仅限蓝牙机型有, 设置不可更改, 有线机型无此功能)

按键	功能
FN + 空格	蓝牙开关 ON/OFF 切换到 USB 有线键盘模式或者连接上一次蓝牙设备。
FN + 1!	长按: 1! 键下红绿交替闪烁, 对第 1! 蓝牙设备。 短按: 切换到 #1 蓝牙设备或者离开 #1 蓝牙设备。
FN + 2@	长按: 2@键下红绿交替闪烁, 对第 2 蓝牙设备。 短按: 切换到 #2 蓝牙设备或者离开 #2 蓝牙设备。
FN + 3#	长按: 3#键下红绿交替闪烁, 对第 3 蓝牙设备。 短按: 切换到 #3 蓝牙设备或者离开 #3 蓝牙设备。

注意: 如蓝牙配对超时或配对失败, 请重新进行配对; 如果主机显示蓝牙配对成功, 但无法使用, 请删除主机蓝牙列表里的这个设备, 关闭主机蓝牙搜索, 重启键盘, 重新配对。

系统控制 (固定设置 不可更改)

FN + @	机械轴双模版本长按3秒开/关按键, 有线版本无此功能。
FN + 4\$	关闭/开启充电指示灯, 低电压报警, 有线版本无此功能。
FN + control	键盘背光和蓝牙待机时间设置, 合打指示 F10: 不休眠, F1: 5分钟后休眠, F2: 10分钟后休眠,.....F9: 45分钟后休眠。

组合功能键 (出厂参考设置, 可通过驱动程序修改)

按键	Mac 模式功能	Win 模式功能
F1	Mac 专用快捷键: 屏幕亮度 -	F1
F2	Mac 专用快捷键: 屏幕亮度 +	F2
F3	Mac 专用快捷键: 静音	F3
F4	Mac 专用快捷键: 音量 -	F4
F5	音量 +	F5
F6	音量 +	F6
F7	上一曲	F7
F8	暂停	F8
F9	下一曲	F9
F10	静音	F10
F11	音量 -	F11
F12	音量 +	F12
⌘	一键呼出 Siri	Print Screen
⌘	一键呼出手写输入	Scroll Lock
⌘	静音	Pause Break
FN + delete	delete	delete
FN + Win	锁定/解锁 Win 功能键	锁定/解锁 Win 功能键

由 GH60 互联网社区玩家提供产品创意, 配件和功能更新

© FCC © RoHS

Keys and backlights can be user-defined by the driver

Win version Driver download address

Since the first version of this driver was released in June 2017, our team has continuously updated over 20 versions. Download from the link.

<http://www.jikedingzhi.com/downloadlist?driverID=41>

Driver download

GK6XPlus Driver V6.0.0.39	download
GK6XPlus Driver V6.0.0.38	download
GK6XPlus Driver V6.0.0.37	download
GK6XPlus Driver V6.0.0.36	download
GK6XPlus Driver V6.0.0.35	download
GK6XPlus Driver V6.0.0.34	download
GK6XPlus Driver V6.0.0.32	download
GK6XPlus Driver V6.0.0.31	download

MAC APP Download address

23th November 2020 first launch

<http://www.jikedingzhi.com/downloadlist?driverID=90>

Driver download

GK6-Mac App V1.0.0.5	download
GK6-Mac App V1.0.0.4	download
GK6-Mac App V1.0.0.3	download
GK6-Mac App V1.0.0.2	download
GK6-Mac App V1.0.0.1	download

用驱动程序重新定义属于你自己的按键功能和组合功能, 背光灯效也可更新下载。

Win 版本驱动下载地址:

自2017年6月发布第一版驱动程序以来, 团队持续更新了超过20个版本。

<http://www.jikedingzhi.com/downloadlist?driverID=41>

驱动下载

GK6XPlus Driver V6.0.0.39	下载
GK6XPlus Driver V6.0.0.38	下载
GK6XPlus Driver V6.0.0.37	下载
GK6XPlus Driver V6.0.0.36	下载
GK6XPlus Driver V6.0.0.35	下载
GK6XPlus Driver V6.0.0.34	下载
GK6XPlus Driver V6.0.0.32	下载
GK6XPlus Driver V6.0.0.31	下载

MAC APP 下载地址:

2020年11月28日首发上线

<http://www.jikedingzhi.com/downloadlist?driverID=90>

驱动下载

GK6-Mac App V1.0.0.5	下载
GK6-Mac App V1.0.0.4	下载
GK6-Mac App V1.0.0.3	下载
GK6-Mac App V1.0.0.2	下载
GK6-Mac App V1.0.0.1	下载

More information and services, please visit www.skyloong.com.cn

Scan the QR code on the right for more information and services

AK61S better for MAC GKB1 PBT keycap AK68 with Panda-themed keycaps AK84 Roland Garros color silicone keycaps SK96 silicone keycap camera mechanical keyboard AK96L left hand version mechanical keyboard

GK61XS CNC wooden case DIY kit GK68XS CNC Aluminium case DIY kit GK73 Semi-permeable PC case DIY kit

GK21 Numeric pad kit CNC case Plate Keycaps Switches

更多产品信息和服务请浏览 www.skyloong.com.cn

扫描右侧二维码获取更多产品信息和服务

AK61S黑白红GK1 PBT键帽配色键盘 AK68熊猫主题键盘 AK84罗兰·加洛斯配色硅胶键帽 SK96 硅胶键帽机械键盘 AK96L 左手版机械键盘

GK61XS CNC木壳DIY套件 GK68XS CNC铝壳DIY套件 GK73 CNC半透壳DIY套件

GK21S数字PDA套件 CNC底壳配件 定位板配件 键帽配件 各种机械开关配件