

AJAZZ® × NACODEX^x

AK816三模热插拔机械键盘

AK816 three-mode hot-swap mechanical keyboard

使用说明书
User Manual

Thank you very much for purchasing our AJAZZ three-mode hot-swap mechanical keyboard. This product has various cool functions and lighting effects. I hope it can bring you a new operating experience. For more customized settings and functions, please visit and download the driver: <http://www.a-jazz.com/>

Technical Parameter

Brand: AJAZZ

Model: AK816

Transmission mode: wired, bluetooth, 2.4G three-mode

Interface type: key line separated Type-C interface

Product size: 327.5x136.5x40.38mm

Product weight: 990g

Shell material: ABS injection molding


Keycap material: PBT ball cap MDA three-color single-sided sublimation

Wire length: 1.8M

Lighting effects: RGB, 18 kinds of lighting effects

Key layout: 81 key layout

Support system: Windows2000/WindowsXP/Vista/Windows 7/8/10

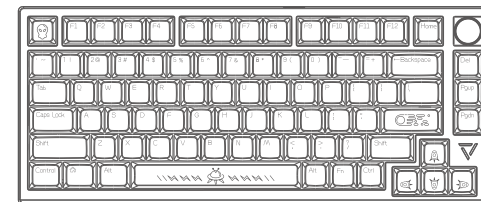

Description of Switch Indication



• Three-stage toggle switch

Switch between wired mode, Bluetooth mode and 2.4G mode, left = Bluetooth mode, middle = wired mode, Right = 2.4G mode, factory default wired mode;

• System mode switching Left = WIN system mode (factory default) Right = MAC system mode

• Light Switch Description:

-
- ① Upper and lower case indicator (blue)
 - ② Charging indicator (lights red when charging, green when fully charged)
 - ③ Device indicator (Bluetooth device 1 red, device 2 green, device 3 blue, 2.4G white)

• Knob Switch Description

Roller down: mute

Turn the knob to the right: volume +

Turn the knob to the left: Volume -

Sleep Mechanism and Bluetooth Name Description

- Deep sleep: Deep standby after 30 minutes of no key operation on the keyboard, Bluetooth disconnects and sleeps, press any key to wake up the keyboard backlight and connect back to Bluetooth;
- Power saving sleep: the backlight will be turned off after 2 minutes of no key operation on the keyboard, press any key to wake up the keyboard backlight and connect back to Bluetooth; (the sleep time can be adjusted by the driver)

• Bluetooth Name:

- ① After BT3.0 is connected, it will display: AK816 KB3.0
- ② After BT5.0 is connected, it will display: AK816 KB5.0

Light Mode Operation Instructions

- FN + \ | Light effect switching, 18 light effects cycle in turn

FN + Multi-function Key Description

- FN + Multi-function Key Description
- FN+1!/2@/3#: Three sets of game lighting effects can be customized
- FN+1!: Default FPS mode — W/A/S/D/ ↑ / ↓ / ← / →
- FN+2@: Default LOL mode — Q/W/E/R/D/G/F/B/V/L-Ctrl/L-Alt/Tab/Space/1-6/Esc
- FN+3#: Default 37-key office mode: A-Z 26 English letters / [] / ; ' / . / , / / / ↑ / ↓ / ← / →
- FN+ -: Record/save lighting mode for the above three game mode lighting effects, press one button for one color during recording, a total of 8 colors
- FN+ up, down, left and right arrow keys: ↑ = light brightness + (five gears are the brightest by default) / FN+ ↓ = light brightness - (five gears)
- FN + Left and right arrow key N+: FN+ ← = dynamic light direction switch /
- FN+ → = switch backlight color
- FN+ “_” : light speed - (five gears default third gear)
- FN+ “=” : Light speed + (five gears)
- FN + space bar: long press for 3 seconds to 5 seconds, the keyboard light flashes 3 times, clear the light effect, and restore the factory settings

Operation Instruction of key Compound Function

Key combination	Function description
FN + F1	Media Player
FN + F2	Volume down
FN + F3	Volume increase
FN + F4	Mute
FN + F5	Player/stops playing
FN+F6	Last song

FN+F7	Play / Pause
FN+F8	Next song
FN+F9	Mail
FN+F10	Browser
FN+ F11	My computer
FN+F12	Calculator
FN+X	Turn off/on keyboard (lighting Default on)
FN+WIN key-L	Lock the WIN key, then press to unlock, the WIN key will light up in white after locking
FN+HOME	INS
FN+DEL	END
FN+PGUP	PRTSC
FN+PGDN	PAUSE

Wired, Bluetooth and 2.4G Connection


- Wired Mode: Connect the keyboard to the USB cable, toggle the switch to the USB gear, and the keyboard flashes red light is the wired connection mode;
- Bluetooth Mode: toggle the switch to BT gear, (this product supports control and storage of 3 Bluetooth devices, through FN+Q, FN+W, FN+E selects and calls between three Bluetooth devices that have been paired successfully. When pressing once to switch paired devices, the device indicator light will flash slowly and enter the reconnecting state. If the switch is successful, the device indicator light will return to long light.) Press and hold for 3 seconds when the Bluetooth pairing is performed. The device light flashes rapidly. Bluetooth device 1 is successfully connected, the device indicator light is solid red, Bluetooth device 2 is successfully connected, the device indicator light is solid green, Bluetooth device 3 is successfully connected, the device indicator light is solid blue

• After switching, the receiver can be used by plugging it into the computer (the device indicator light will be white after the connection is successful)


• Note: The factory keyboard and receiver have been paired successfully. Press and hold the FN+R key combination to match the code, the device indicator light flashes rapidly in white to enter the code, and the computer can be plugged into the receiver at this time (connect the USB cable in any wireless mode to charge the device)

Hot swap operation steps


Hot-swappable: can replace different shafts, customize your favorite tactile and auditory feedback, the triangular shaft seat is compatible with most mechanical shafts.

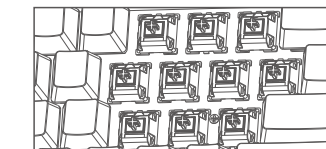


① Pull out the keycap with a key puller

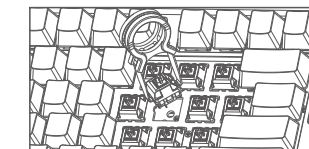

② The shaft puller pulls out the switches

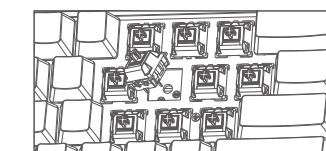

③ Proofreading pins and holes

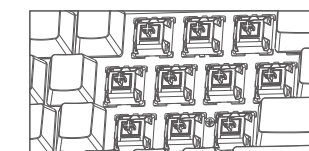

④ Press the shaft vertically

执行标准号： 鼠标GB/T 26245-2010
键盘GB/T 14081-2010
耳机GB/T 14471-2013

产品质保 (Product Warranty)

感谢您对黑爵产品的信任与支持，为了让您放心使用本产品，更好地保障您的权益，我公司将严格遵守并执行相关规定，实行售后服务。

1. 服务有效期：自购买之日起质量保证12个月
2. 服务内容：按微型计算机商品维修更换退货责任规定进行服务
3. 不属于服务之范围：
 - a. 已经超出有效服务或免费维修期的；
 - b. 未按照正确使用说明使用、维护、保管导致故障或损坏的；
 - c. 非本司授权维修机构维修导致的故障或损坏；
 - d. 质保卡上无经销商资料及盖章之产品；
 - e. 擅自涂改三包凭证内容的；
 - f. 由于不可抗力(如自然灾害等)原因造成产品之不良；
 - g. 人为因素导致产品不良(如操作失误、碰撞、输入不合适电压等)；
 - h. 其他非产品设计、技术、制造、质量等问题导致的故障或损坏。



质保卡 (Warranty Card)

产品型号： _____
 购买日期： _____
 客户姓名： _____
 联系电话： _____
 联系地址： _____



AJAZZ 黑爵

★ 本凭证为黑爵产品售后服务的重要依据，请您妥善保管。
 ★ 任何产品问题，可扫码咨询微信公众号小编

制造商：深圳市黑爵同创电子科技有限公司
 地址：深圳市光明新区公明街道马田北路102号A栋2楼
 电话：86-755-2740 7340
 执行标准号：GB/T 14081-2010