


# 108Keys series RGB USB Wired / USB+Bluetooth 2 mode

SKYLONG

Wired item:GK108/SK108

U+B 2mode item:GK108S/SK108S

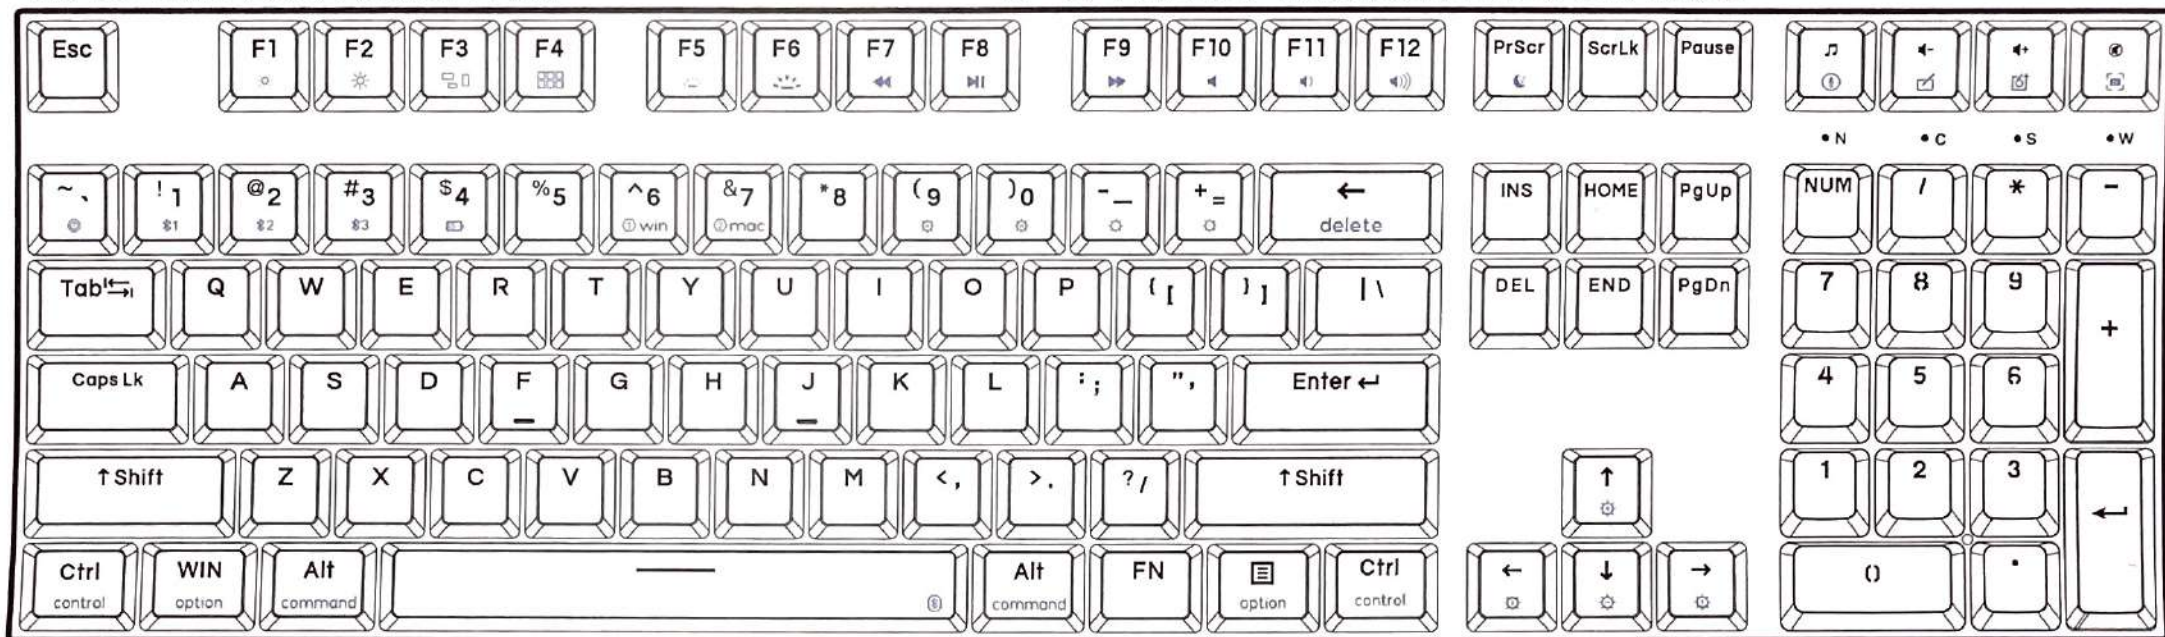

\* NOTE:Press Fn with the function keys.

\* One of the blue LED is flashing,The keyboard is connecting the BT equipment.

+ Bluetooth ON/OFF switch,Link to USB mode.

## fn function description (Double-click FN to light FN's white LED,FN function is held,click FN again to escape from holding status).

### Define mode

Key	Function
Standard mode	Standard mode, all buttons can not be user-defined. User can customize your own personality keyboard by the following 4 modes. On-board mode 1/2/3 is strongly recommended,(Note: In the custom mode, except FN key, other keys can be redefined key values, some of the FN + " x " function can be also modified,except the backlight ,bluetooth and system control. The FN button can not be moved, but user can define your own FNx at any key in the custom mode.
FN + 6^ Onboard mode1 WIN mode	① FN + 6^, onboard mode layer 1, " 6^ " lights white LED, no need to run and connect the driver. The keyboard works in the custom key functions and user can modify the key functions and macro Settings by the driver and these Settings can be downloaded and saved to the keyboard. The reference setting: WIN mode setting to realize the habitual operation of win users
FN + 7& Onboard mode2 MAC OS mode	② FN + 7&, onboard mode layer 2, " 7& " lights white LED. The reference Setting-keyboard of MAC OS, the "control,option,command" key will be in the original position, user can modify the Settings by the driver, download and save to the keyboard , no need to run and connect the driver when use the Mac's function settings. Press FN + 7& again, back to the standard mode.
Driver mode	Drive mode: Keyboard needs to be run and connected the driver in USB wired mode when realizes key function and light effects , some special function(for example:You may assign a macro of more than 32 bytes to a key in the driver mode while it's unavailable in those onboard mode layer) You must need keep the driver running and the keyboard connect with the driver.
FNx setting Onboard mode3	FNx setting: If you don't like the FN position and FN combination key function, you can set your own FNx position and FNx combination key function, some special function keys, or combination keys, or macro keys,these settings of this mode can be called by the FNx key in layer1& layer2. all settings in these mode can be modified and saved to the keyboard.

### Backlight settings (Can not modify )

Key	Function
FN + 0)	⊛ Light effect pause/play
FN + 9(	⊛ Backlight ON/OFF
FN + ~-	⊛ Backlight mode 1-5 (Can modify)
FN + +=	⊛ Backlight mode 6-9
FN + ↓	⊛ Backlight brightness -
FN + ↑	⊛ Backlight brightness +
FN + ←	⊛ Backlight Effect Speed -
FN + →	⊛ Backlight Effect Speed +

### Bluetooth settings (Only for bluetooth mode,can not modify)

Key	Function
FN + Space	⊛ Bluetooth ON/OFF switch Link to USB mode or the last BT equipment.
FN + !	⊛ Long press: The red&green LED of 1! keycap will flash, The 1! bluetooth equipment can be paired. Press: The keyboard will connect the 1! BT equipment or disconnect.
FN + 2@	⊛ Long press: The red&green LED of 2@keycap will flash, The 2@ bluetooth equipment can be paired. Press: The keyboard will connect the 2@ BT equipment or disconnect.
FN + 3#	⊛ Long press: The red&green LED of 3# keycap will flash, The 3# bluetooth equipment can be paired. Press: The keyboard will connect the 3# BT equipment or disconnect.

Note: If the Bluetooth pairing timed out or failed, please re-pair; if the bluetooth pairing is successful on the equipment, but the keyboard can not work still, Please delete this keyboard in the Bluetooth list, Turn off bluetooth of your PC or Mobile , restart the keyboard, and re-pair.

### System Control (Cannot modify)

FN + ⊙	Mechanical dual model series long press for 3 seconds to on/off the keyboard.
FN + 4\$	⊛ On/Off the charging indicator, low voltage alarm, the wired version does not have this function.
FN + PrScr	⊛ Keyboard's sleep time setting, white LED on0:never sleep, 1:5minutes, 2:10minutes..... 9:45minutes to sleep.

### Fn function(Reference Settings, can be modified by driver)

Key	Mac mode function	Win mode function
F1	⊛ Screen brightness - for Mac	F1
F2	⊛ Screen brightness + for Mac	F2
F3	⊛ for Mac	F3
F4	⊛ for Mac	F4
F5	⊛ Backlight brightness - for Mac	F5
F6	⊛ Backlight brightness + for Mac	F6
F7	⏪ Previous	F7
F8	⏩ Play/Pause	F8
F9	⏩ Next	F9
F10	⏴ Mute	F10
F11	⏴ Volume -	F11
F12	⏴ Volume +	F12
FN + Backspace	delete	delete
FN + Win	⏹ Lock/Unlock Win key	⏹ Lock/Unlock Win key
⊛	⊛ One click call Siri for Mac	⊛ Music
⏴	⏴ One click call handwriting for Mac	⏴ Volume -
⏴	⏴ Ctrl+W	⏴ Volume +
⊛	⊛ Screenshot for Mac	⊛ Mute



From The community, For The community!

CE FCC RoHS

Created from Basic User