

# onn.™

## 6-DEVICE UNIVERSAL REMOTE



Model: 100020904

---

## PRODUCT GUIDE

Need help?

We're here for you every day

7 a.m. – 9 p.m. CST.

Give us a call at 1-888-516-2630

Please visit the website "[www.onn-support.com](http://www.onn-support.com)"  
to get more information.

## TABLE OF CONTENTS

<b>INTRODUCTION</b>	<b>2</b>
<b>GETTING STARTED (BATTERIES)</b>	<b>3</b>
<b>GETTING STARTED (BUTTONS)</b>	<b>4</b>
<b>SETUP</b>	<b>7</b>
<b>ONN DEVICE SETUP</b>	<b>7</b>
<b>SETUP - SIMPLESET</b>	<b>8</b>
<b>SETUP - SETUP BY CODE</b>	<b>10</b>
<b>SETUP - LEARNING</b>	<b>11</b>
<b>SETUP - VOLUME LOCK</b>	<b>12</b>
<b>CHANNEL SHORTCUT MACROS</b>	<b>13</b>
<b>APP SHORTCUT KEYS</b>	<b>14</b>
<b>ACTIVITIES</b>	<b>16</b>
<b>AV SHIFT</b>	<b>17</b>
<b>POWER MACRO</b>	<b>17</b>
<b>SETUP BY ACTIVITY</b>	<b>17</b>
<b>FCC INFORMATION</b>	<b>19</b>
<b>CODELIST</b>	
<b>TV</b>	<b>20</b>
<b>STREAM</b>	<b>22</b>
<b>STB</b>	<b>22</b>
<b>AUDIO SOUNDBAR</b>	<b>38</b>
<b>BLURAY DVD</b>	<b>39</b>

## INTRODUCTION

Thank you for purchasing the ONN Device Universal Remote Control. The remote can be used to control up to 6 Audio Video Devices such as a TV, Set Top Box, Blu-ray Player or Sound Bar and boasts multiple extra features to make the most of your living room experience.




The remote also features a backlight for easy control in a darkened room. This manual will help you to set up the ONN 6 to control all of your devices and take advantage of its features.

## GETTING STARTED (BATTERIES)

Your remote requires 2 x AA / LR6 batteries. Please insert them as shown below. Alkaline batteries are recommended.

### Installing the Batteries


1. Remove the battery cover.
2. Insert the batteries as shown.
3. Snap the battery cover back into place.

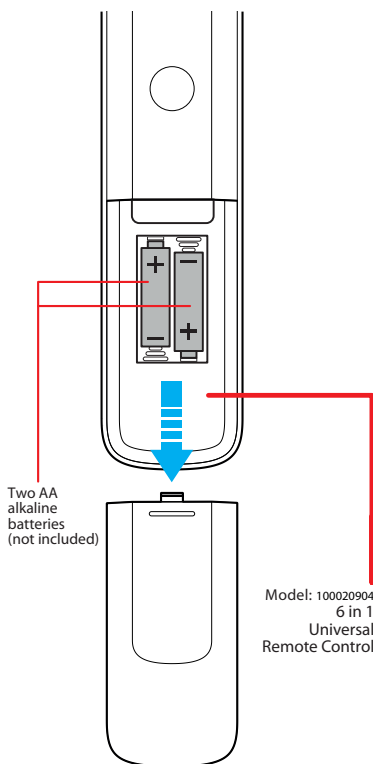

### Battery Precautions

- Do not mix old and new batteries.
- Do not mix alkaline, standard (carbon-zinc) or rechargeable (nickel-cadmium) batteries.
- Always remove old, weak or worn-out batteries promptly and recycle or dispose of them in accordance with local and national regulations.

## GETTING STARTED (BUTTONS)

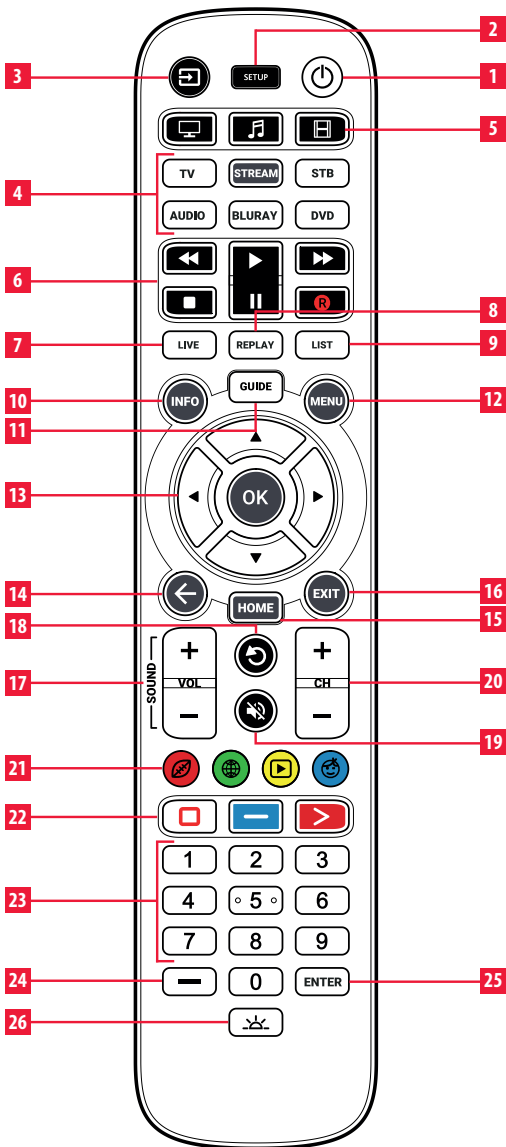



## GETTING STARTED (BUTTONS)

- 1 Power** Switches your devices on and off
- 2 Setup** This key is used to set up the ONN remote
- 3 Input** Used to select Input on devices
- 4 Device keys**

These keys are used to select which device the ONN 6 currently controls. After pressing the TV key, the remote will control your TV. To switch to controlling another device, simply press the appropriate key. The devices that can be programmed to each key are as follows:

TV: All televisions such as LED, LCD , Plasma, OLED etc.  
STREAM: Streaming devices such as an Apple TV, Roku Box etc. Also works Xbox 360 and Xbox One.  
STB: Set Top Boxes, including Satellite, Cable and DTV.  
AUDIO: Audio devices including Sound Bars, AV Receivers and Hi-Fi  
BLURAY: Blu-ray Players and DVD Players / Recorders  
DVD: DVD Players / Recorders and Blu-ray Players
- 5 Activities**

Control up to 3 of your devices in one mode Watch TV, Listen To Music and Watch Movie – See “Activities” for how to set up and use
- 6 Playback Keys**

Control the playback of movies, music and TV
- 7 Live** Return to live TV from Timeshift or recording
- 8 Replay** Replay last 30 seconds
- 9 List** Show list of recordings
- 10 Info** Displays information about the current shows or channel
- 11 Guide** TV Guide
- 12 Menu** Access the installation menu of the current device
- 13 Menu Directions and OK**





Control the menu of the current device
- 14 Back** Back one step in the Menu
- 15 Home** Displays the Home Menu

## GETTING STARTED (BUTTONS)


- 16 Exit** Exits the menu
- 17 Volume Up and Down**  
Control the volume of the current device. You can also set up these keys to always control one device. For details see the Volume Lock feature.
- 18 Last Channel**  
Changes to the last channel viewed.
- 19 Mute** Mutes the volume of the current device. You can also set up this key to always control one device. For details see the Volume Lock feature.
- 20 Channel Up & Down**  
Change channels on the current device.
- 21 RGYB keys**  
Quick access buttons for the menu of the current device. They can also be programmed to select your favorite channels. See the Favorite Channel Macros feature for details
- 22 App Shortcut Keys**  
Keys for starting streaming apps. See the App Shortcut Keys section for details.
- 23 Digits** Select channels on the current device. On Audio devices, these keys will select individual inputs.
- 24 Delimiter "Dash" key**  
Selects sub channels such as local news and extra functions in the Menu mode of your Set Top Box
- 25 Channel Enter**  
On some devices press this key after using the digit keys to enter your channel number
- 26 Backlight On / Off**  
Turns the backlight on or off. When on, any key press will activate the backlight for 10 seconds. Press this key to turn the backlight off and again to turn back on.

## SETUP

The ONN 6 remote is pre-programmed to control some of the most popular devices out of the box. If you have one of the following devices try putting the batteries in and pressing the device key, and then press a few keys to see if the remote works your device:

Device Key To Press	Device controlled
 <b>TV</b>	Samsung TV
 <b>STREAM</b>	Roku Streaming Box
 <b>STB</b>	Comcast Set top box
 <b>AUDIO</b>	Yamaha Receiver
 <b>BLURAY</b>	Samsung Blu-ray Player
 <b>DVD</b>	Sony DVD Player




If your device is not one of those listed above, or you have extra devices to set up, there are 3 ways to do this. The easiest is SimpleSet which is used for the common brands and devices.



## ONN DEVICE SETUP

**onn**™

If you have a TV, DVD Player, Blu-ray Player or Sound Bar from Onn, the procedure to set them up is as follows:

-  Hold down the Device Key for the device you want to set up (e.g. TV for TV).
-  Hold down the Setup key until the LED under the LED blinks twice.
-  Enter the first 4 digit code listed for your device below, for example 4398 for TV.
- The LED should blink twice. Now try pressing a few keys to see if the remote works your device. If so, your remote is ready to use. If not, repeat from step 1 with the next code in the list.

### The codes for Onn are:

<b>TV</b>	4398, 1709, 3024, 3078, 5118, 1756, 5438
<b>AUDIO including Sound Bar</b>	5042, 5041, 5412, 5414, 5415, 5416, 5043
<b>BLURAY + DVD</b>	4016, 4371, 4377

## SETUP - SIMPLESET

If the brand of your device is shown in the SimpleSet list next to a digit key, you can use the SimpleSet system described in this section, please locate the brand of your device and note the key associated with it.

### TV

- 1 Element
- 2 Insignia
- 3 LG
- 4 Philips, Magnavox
- 5 ◦ Samsung, Panasonic, Sceptre
- 6 Sharp, Hisense
- 7 Sony, Sanyo
- 8 TCL, RCA
- 9 Toshiba, Westinghouse
- 0 VIZIO

### STREAM

- 1 AirTV, Sling TV
- 2 Apple
- 3 Microsoft
- 4 Netgear
- 5 ◦ NVIDIA
- 6 Popcorn Hour
- 7 Roku
- 8 Sony
- 9 Western Digital
- 0 Xiaomi

### STB

- 1 Bell
- 2 Comcast/Xfinity
- 3 Cox Communications
- 4 DIRECTV, AT&T, Sky Mexico  
DISH Network, Dish Mexico,
- 5 ◦ Izzi Telecom
- 6 Optimum, Suddenlink, Altice
- 7 Rogers
- 8 Shaw
- 9 Spectrum, Charter,  
Time Warner Cable
- 0 Verizon, Frontier  
Communications



# SETUP - SIMPLESET

## AUDIO




1	Bose
2	Denon
3	Harman/Kardon
4	JBL, Polk Audio
5	LG
6	Onkyo
7	Samsung
8	Sonos, VIZIO
9	Sony
0	Yamaha

## DVD and BLURAY

1	Insignia
2	LG, Sharp
3	Panasonic
4	Philips, Magnavox
5	Pioneer
6	Samsung
7	Sony
8	Toshiba
9	VIZIO, RCA
0	Yamaha



### To set up your device:





1. Turn on your device (not on standby) and point the ONN remote towards it. If you are setting up a Streaming device, make sure a movie or TV show is playing.
2.  Press the Device key you wish to set up (for example TV).
3.  Hold down the Setup key until the LED under the Device key blinks twice
4.  Hold down the digit key for your brand and device as listed in the tables above - e.g. 3 for an LG TV.

## SETUP - SIMPLESET

5. The remote will send a Power command every 3 seconds, but if your device does not have a Power function (for example a streaming box like Apple TV) the remote will send the Play/Pause function. You may have to hold down the digit key for up to a minute.
  6. As soon as your device reacts by turning off or pausing (Streaming box only) release the digit.
  7. The LED will blink twice and the remote should now operate your device.
- If you find one or more keys do not work as you expect, start again at step 2 – the remote will start with the next code in the memory.

## SETUP - SETUP BY CODE

If the brand of your device is not listed in the SimpleSet feature, you can set up by trying codes individually. To do this, firstly locate your brand in the Code List. Codes are listed by brand and device, and in order of popularity.

1. Turn on your device (not on standby) and point the ONN remote towards it.
2.  Press the Device key you wish to set up (for example TV)
3.  Hold down the Setup key until the LED under the Device key blinks twice
4.  Enter the first 4 digit code listed for your brand (e.g. 1840 for LG).
5. The LED will blink twice on the last digit of the code.
6.  Now aim the remote towards your device and press the Power key.\*
7. If the device turns off your remote is ready to use. If not, repeat steps 2-6 with the next code in the list.


\* Note: If your original remote did not have a Power key, try testing with a different key at step 6. For example try pressing Play or Pause when setting up a streaming box and see if the box responds.







## SETUP - LEARNING

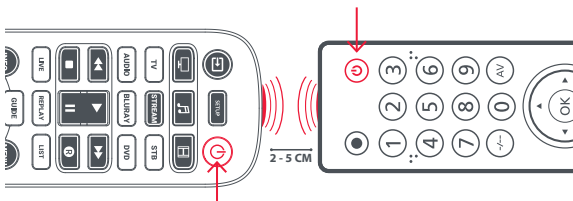Your ONN remote control can learn any function from any other working remote control. This is a quick and easy one-time setup that allows you to control any infrared controlled device you have in your living room. It also allows you to add a key or keys that may be missing to a spare key on the ONN.

To do this, firstly make sure you have all your original remote controls to hand, and that they have working batteries in.

To learn functions, the original remote should be approximately 2-5 cm from the ONN remote, pointing towards it:



-  Press the Device key for the device you want to learn functions onto (e.g. TV).
-  Hold down the Setup key until the LED under the Device key blinks twice.
-  Press 975 – the LED should blink twice.
-  Press and release the key you want to learn a function onto (for example the Power key) – the LED will begin to flash rapidly.
-  Press and release\* the corresponding key on the original remote, for example Power.
- The LED will blink twice to indicate the key has been learned correctly.
- Repeat steps 4 and 5 for each key you want to learn – remember you can learn from multiple remotes, but only one function per key.
-  When you have learned all the functions you require, press and hold the Setup key until the LED blinks twice.

\* Some remotes send commands differently. If you find a function cannot be learned, try holding down the key on the original remote instead of pressing and releasing.

Hints:





- If the LED shows one long blink at step 5, the function was not learned correctly, please try again from step 4.

## SETUP - LEARNING

- If you find one or more keys don't work properly after set up, you can re-enter the learning mode at any time by repeating the procedure from step 1.
- If one or more of your original remotes aren't working, you can still set up the ONN remote by SimpleSet or Code Set Up.






### Deleting a learned function

If you want to delete a learned function and return that key to its original state, you can use the following procedure:

1. Press the Device key for the device your learned function operates
2.  Hold down the Setup key until the LED under the Device key blinks twice
3.    Press 976 – the LED should blink twice
4. Press the key you want to reset twice – the LED should blink twice and the learned function has been deleted.

## SETUP - VOLUME LOCK

If you primarily use one device for controlling sound, for example a Sound Bar or Audio Video Receiver, it's possible to program your ONN remote to only control that device when you use the Volume Up, Down and Mute keys. To do this:




1.  Hold down the Setup key until the LED under the Device key blinks twice.
2.    Press 993 – the LED should blink twice.
3.  Press the device key for the device to always control volume – for example Audio.
4. The LED will blink twice.

From now on, pressing the Volume Up, Down or Mute keys will always control the the above programmed device, no matter what device you are controlling.



## SETUP - VOLUME LOCK

To unlock the volume, and return the remote to controlling each device's sound individually, the procedure is:

-  Hold down the Setup key until the LED under the Device key blinks twice
-  Press 993 – the LED should blink twice
-  Press VOLUME DOWN – the LED will blink four times and Volume is now unlocked.

## CHANNEL SHORTCUT MACROS







As well as their normal functionality, the Red, Green, Yellow and Blue keys can be reprogrammed to select your favorite channels by genre. If you press and release each of these keys, they will perform exactly the same function as your original remote.

However they can be reprogrammed so that when they are held down for 3 seconds they will send a channel number, then when held down again for 3 seconds, they will send a different channel number. You can group these channels by genre such as Sports, News, Movies and Kids.



The procedure to program is as follows: Say for example, the first 3 Sports channels are on channels 200, 201 and 239, you can assign shortcuts to these channels on the Red (Sports) key. To do this:

Firstly select the device you use to watch live TV. For example if you are a DirecTV subscriber and you have set up your Set Top Box on the STB key, press STB. Now you can program the channel shortcuts.

-   Hold down the Setup key and the Red key until the LED blinks twice
-  Enter the first channel number (200)
-  Press and release the Red key
-  Enter the next channel number (in this example 201)
- Repeat Steps 3 and 4 for each channel shortcut you want to add
-  After entering the last channel number you want, press and hold the SETUP key.





## CHANNEL SHORTCUT MACROS

The LED will blink twice and the shortcuts are now programmed. When watching live TV, simply hold down the Red key for 3 seconds, and the first Channel Shortcut will be sent (in this example channel 200). The next time you hold down the Red Key, the shortcut for the next Channel Shortcut will be sent (in this case channel 201).

You can reprogram each of the different colour keys with different lists of channel numbers, by holding down the Setup and a different coloured key at step 1, and pressing and releasing the same key at step 3. Each coloured key has a different icon to help you remember the channels that you have stored there. You can program up to 8 different channel numbers per key.



If you wish to reset the key to default, the procedure is as follows:


-  Press the device key you have programmed the shortcuts on (for example STB).
-  Hold down the Setup key and the key you wish to reset (for example the Green key) until the LED blinks twice.
-  Press and release the key to reset (for example the Green key).
-  Hold down the SETUP key until the LED blinks twice.

The key is now reset.

## APP SHORTCUT KEYS

The ONN remote features three App Shortcut Keys which can be used to open apps on your Smart Devices. If your original remote control has a Netflix, Amazon Prime Video or YouTube key, these keys will perform the same function.

However if you did not have a key like this, but still had the ability to watch a streaming service, you can use this key as a shortcut by programming a macro on it. Most AV devices which are connected to the internet, such as Smart TVs or streaming Set Top Boxes have one or more applications they can run to access TV viewing via the internet. Examples of these would be Netflix, YouTube, Amazon Prime or similar.






## APP SHORTCUT KEYS

To program the macro, you first need to know the device you use to access the service, and then the sequence of keys you need to press to always bring up the service you prefer. For example, some Panasonic TVs will start Netflix by pressing the Apps key, then Menu Down Twice, and finally the OK key. Or on an Apple TV, the sequence is Menu, Menu Down and OK.



Once you have determined the sequence for your device, follow these steps:

1. Sit in front of your device with it switched on (not on standby)
2.  Hold down the App Shortcut key until the LED blinks twice.
3.  Press the device key for the device you want to use for the macro (e.g. Stream)
4. Now perform the sequence of keys exactly as you would normally to start your streaming service. The remote will operate your device and the macro is recorded in real time - so if it normally takes a few seconds for your device to react don't worry.
5.  Once you have finished the sequence - and the Streaming Service has started on your device - hold down the App Shortcut key until the LED blinks twice and goes out. The macro is now stored.

### Tips

- Make sure the ONN remote is operating the device in question before programming
- If you find the Macro doesn't work as expected, you can just repeat the same sequence to reprogram
- When programming, wait for your device to respond first, the remote will remember the timing
- The App Shortcut macro is tied to one device, remember to make sure you are watching the correct device

## ACTIVITIES

An Activity is a combination of devices.

On a standard universal remote control if you want to control different devices you need to swap between them using the device keys. So you wanted to control the input of your TV, the channels and guide of your DirecTV and the volume of your sound bar, you would need to swap between these by pressing the TV, STB and Audio keys.

On the ONN remotes these devices can be grouped into one Activity mode, so after pressing watch TV, the Input key will control the TV, the Volume Up, Down and Mute will control the Sound Bar and the other keys will control the Set Top Box.



The ONN remote has 3 Activity modes, specifically Watch TV, Listen To Music and Watch Movie.

Each of these modes has a choice of devices to combine.

These are:



### Watch TV

- 1 Combination 1 – TV + STB + AUDIO (default)
- 2 Combination 2 – TV + STB
- 3 Combination 3 – TV + AUDIO



### Listen To Music

- 1 Combination 1 – TV + BLU + AUDIO (default)
- 3 Combination 3 – TV + STREAM + AUDIO
- 5 Combination 5 – AUDIO only






### Watch Movie

- 1 Combination 1 – TV + STREAM + AUDIO (default)
- 2 Combination 2 – TV + STREAM
- 3 Combination 3 – TV + BLU
- 4 Combination 4 – TV + BLU + AUDIO

If you set the default devices for any Activity on the remote (for example a TV, STB and Audio for Watch TV) that Activity will be set up automatically on the remote.

If you would like to change to a different combination, the procedure is as follows:

## ACTIVITIES

-  Hold down SETUP until the LED under the device blinks twice. The LED under the current device will stay lit.
-  Press the Activity key you want to set up (e.g. Watch TV).
-  Press the number of the combination you want to set – e.g 3 For TV + AUD in Watch TV.
- The LED will blink twice and go out.

To access the Activities, simply press the ACTIVITY key. You can return to controlling by device by using any Device key.

## AV SHIFT

As the AV key is intended to select the input on your TV and most TVs use a menu to select from a list of inputs, when the AV key is pressed in an Activity, the Menu Up, Down, Left, Right and OK keys temporarily control the TV. If the OK key is pressed, or no key is pressed for ten seconds, these keys will revert to controlling the relevant device for the Activity (e.g. STB in Watch TV Mode).

## POWER MACRO

If you hold down the Power key for 2 seconds in any Activity, the remote will send the Power function for each device contained within that Activity. So for example, holding Power in the default setting for Watch TV will turn both the TV and Set Top Box on or off.

## SETUP BY ACTIVITY

As well as selecting your device combinations, Activities can be used to set up a combination of devices.

If you have a combination of devices of the below brands, you can use this to easily set up your ONN remote to control all 3 devices with just one step using 3 digits.

The combination of devices for each Activity is:



Watch TV  
TV + STB + AUDIO

## SETUP BY ACTIVITY



Listen To Music  
TV + BLU + AUDIO



Watch Movie  
TV + STREAM + AUDIO

If you want to use one of those combinations for your Activity, the next step is to check if you have the devices below:







### DEVICE BRAND DIGITS

Digit	TV Brand	STB Brand	STREAM Brand	BLU Brand	AUDIO Brand
1	Samsung	DirecTV	Apple	Samsung	Samsung
2	Sony	Dish Network	Xbox One	Sony	Vizio
3	LG	Verizion Frontier FiOS	Roku	LG	Yamaha
4	Panasonic	AT&T Uverse		Vizio	Onkyo
5	Vizio			Pioneer	
6	TCL Roku			LG	
7	Insignia				

If you have the right combination, just note the digit for each device.

For example, if you have a Sony TV, a DirecTV receiver and an Onkyo Audio device like a sound bar, you can use the digits 2, 1 and 4 to represent your combination.

To set up the Watch TV Activity as well as the three devices involved in that Activity, the procedure is:

1.    Hold down the Activity key you want to set up until the LED blinks twice.
2.    Enter the 3 digit code for your 3 devices (e.g. 214).
3. The LED should blink twice and all 3 of your devices and the Watch TV Activity are now set up.

From now on, the TV device key will control a Sony TV, the STB Device controls a DirecTV receiver and the Audio key controls an Onkyo sound bar, and your Watch TV Activity combines all three of these.

You can repeat this for the Listen to Music and Watch Movie Activities replacing the second digit with the brand of Blu-ray player or Streaming box, as long as they are listed above.

If not, you should use the SimpleSet or Code Setup methods listed earlier.

## FCC INFORMATION

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**CAUTION:** Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

TV	
Acer	4143
Admiral	3879
Affinity	3717, 3870, 3577, 3716
Aiwa	1362
Akai	1675
Akura	1687
AOC	3720, 2691, 1365, 2014, 2087
Apex Digital	2397, 4347, 4350
Ario	2397
Asus	3340
Asustek	3340
Atvio	3638, 3636, 3879
Atyme	2746
Audiosonic	1675
Audiovox	1564, 1276, 1769, 2121
Auria	4748, 2087, 2014, 2277
Avera	2397, 2049
Avol	2735, 4367, 3382, 3118, 1709
Axen	1709
Axess	3593
BenQ	1756
Blu:sens	2735
Bolva	2397
Broksonic	1892
Calypso	4748
Champion	1362
Changhong	4629
Coby	3627
Commercial Solutions	1447
Conia	1687
Contex	4053, 4280
Craig	3423
Crosley	3115
Curtis	3577, 2855, 2466, 3895, 2352, 2397, 3939, 4035, 3636, 3382, 3717
Curtis Mathes	1661
Daewoo	1661, 3115, 3879
Digitrex	4207
Disney	1892
DNS	3879
Durabrand	1463, 1595, 3879
Dynex	2049, 2184, 1780, 1463
Electrograph	1755
Electrohome	1670
Electron	2466, 2855
Element	3559, 1687, 2183, 2964, 4635, 5173, 4910, 4398, 1886, 4217, 4740
Elite	1457
Emerson	1864, 1963, 1394, 1886, 1595, 3623, 1661, 2183, 3559
Envision	1365, 2087, 2014
Epworth	1362
EQD	2014, 2087, 2277
EQD Auria	2014, 2087, 2277
ESA	1595, 1963
eTec	2397
Exorvision	3953
Favi	3382
Fisher	1362
Fluid	2964
Fujimaro	1687
Funai	1595, 1864, 1394, 1963
Furrion	3332, 4093
Gateway	1755, 1756
GE	1447
General Electric	1447
GFM	1886, 1963, 1864
GPX	3980, 3977
Haier	2309, 1749, 1748, 3382, 1753, 3429, 2293, 4398, 2214
Hannspree	1348, 2786
Hisense	3519, 4740, 4618, 2183, 5185, 1660, 3382, 4398
Hitachi	1643, 4398, 5102, 4455, 3382, 0679
Hiteker	3118
HKPro	3879, 2434
Hyundai	4618
iLo	1463, 1394
Insignia	2049, 1780, 4487, 3227, 1564, 1641, 2184, 1892, 1423, 1660, 1963, 1463
iSymphony	3382, 3429, 3118, 3094
JVC	1774, 1601, 3393, 2321, 2271, 4107, 4398, 5182, 4105, 4053, 1670, 1892, 4280, 4367
KC	4182
KDS	1687
LeEco	4007
Legend	2397, 2352, 1749, 2309
Lexus	3638
LG	1840, 2731, 1423, 1860, 2358, 4397, 3401, 4398, 0017
Liberton	3183
Lloyd's	3382
LXI	0017
MAG	1687
Magnavox	3623, 1866, 2372, 1454, 1455, 1963, 1365, 1755, 1867, 4740, 1394, 4398
Marantz	1454
Maxent	1755
Memorex	4686, 1892, 1670, 1687
Mitsubishi	1250, 1797
Mitsubishi Electric	1250, 1797
Mitsui	1123, 3638, 3673



Mx Onda	1687	Roku	4398
Mystery	3879	Runco	0017
Naxa	4093, 2104, 2735, 3382, 3423	Sampo	1755
NEC	3257, 1797, 3000, 2293	Samsung	2051, 1632
NetTV	1755	Sansui	1892, 3540, 1670, 1463, 4053, 3564, 4280, 3559
Nexus	1564, 3519, 2183	Sanyo	1142, 1362, 4168, 4740, 4667, 3488, 2049, 1480, 1564
Nexus Electronics	2183	Sceptre	3899, 2528, 4886, 4139
Nikko	0017	Seiki	3953, 4635, 2964, 3559, 3560, 4794, 3382, 4217
Nimbro	2104	Sens	1749
Norcent	1365	Seura	4751
NuVision	2158, 1657, 4347	Sharp	2360, 3519, 3394, 4618, 4740, 1659, 4507, 4398
oCOSMO	3899, 4139	Sigmatc	3477, 3423
Ölevia	1610	Silo	3899, 3477, 4182
Onn	4398, 1709, 3024, 3078, 5118, 1756, 5438	Silo Digital	3899, 3477, 4182
Optimus	0679	SkyVue	4135, 2360
Orion	1463, 1892, 3540	Solé	4549
Otic	1687	Sony	0810, 4448, 4189
Panasonic	1291, 1480	Spectroniq	1687
PARK	2104	Speler	4105, 4041, 2434
Philco	1963, 1394	SunBriteTV	2528, 1610
Philips	1867, 1455, 2372, 1454, 3069, 3623, 1866, 3396, 1744, 0017, 2800, 4398, 1755, 1963, 1365, 1394, 4740	Sungpo	2360, 3519, 3394, 4618, 4740, 1659, 4507, 4398
Philips Magnavox	3396, 1866, 3623	Supersonic	3593, 2104, 1753
Pioneer	0679, 1260, 1457	SVA	1963
Planar	0679	Sylvania	1864, 1963, 1886, 1394, 1595, 3332, 4053
Polaroid	1523, 1769, 4035, 1687, 1276, 1767, 3942, 2121, 3382, 2434, 3118	Symphonic	1595, 1963, 1394
Portland	1661	Syntax	1610
Prima	1753, 1749	Tatung	1756
Proscan	1447, 3577, 3382, 2183, 3717, 3332, 3636, 4494, 3895, 3953, 4495, 4035, 4053, 4491, 3939, 4483, 4375, 4500, 2746, 3429, 4093	TCL	4398, 2434, 3183, 3879
Proview	1687	Technics	0017
Pulsar	0017	TNCi	0017
Pyle	2196	Toshiba	2724, 3945, 4885
Pyle Home	2196	U-max	4629
QFX	3593	Upstar	4182, 4405, 3899
QuantumFX	3593	Vidao	2397
Quasar	1291, 4207, 3899, 4367, 3382	Viewsonic	2014, 3706, 2087, 2277, 1755, 2049, 1564, 1365
RCA	1447, 2434, 2247, 2746, 4214, 3577, 1781, 3382, 4740, 3332, 3717, 2932, 3895, 2187, 2183, 4494, 3636, 3939, 4488, 3953, 4053, 2855, 4491, 4627, 0679, 4035, 4483, 4495, 4623, 4625, 1661, 3519, 4629, 3938, 4093, 1670	Viore	3382, 2352, 3118, 2104, 3429, 3094
		VisionQuest	1687
		VIZIO	1758, 3758, 4905, 2707, 4723, 2757, 1756, 3415, 2512
		W Box	4686
		W Box Technologies	4686
		Wards	0017
		Westinghouse	1712, 4797, 3382, 4910, 5173, 2293, 3559, 2397, 3908, 4635
		White Westinghouse	1661

Wyse	1365
Xiahua	1753, 1749
Xococo	1753, 1749
Zenith	0017, 1423, 1661, 2731, 1365, 2358, 3401, 1463

**STREAM**

ABS	1272
AirTV	5295
Alienware	1272
Amlogic	4899
Apple	2615
Armada	4899
Beelink	5123
Boxee	3693
Ceton	1272
Cloud Media	2260
CyberPower	1272
Dell	1272
DishTV	5295
D-Link	3671, 3693
Echostar	5295
Funai	3339
Gateway	1272
G-Box Midnight	4440
Geniatech	4339
Hewlett Packard	1272
Howard Computers	1272
HP	1272
Hush	1272
iBUYPOWER	1272
Iomega	2558
Kollins	4339
LG	3373
Linksys	1272
Logitech	3272
Magnavox	3339
Matricom	4440, 4899
Media Center PC	1272
Mi	3982
Micca	3850
Microsoft	4000, 1272, 2049
Millet	3982
Mind	1272
Minix	4413, 3884
MyGica	4339
Netgear	3324, 2036, 4401, 3292
NiveusMedia	1272
Northgate	1272
NVIDIA	4918
Ortek	3122
Panasonic	3760
PDP	5724
Pivos	4339
Popcorn Hour	2260
R-Box	5540
RCA	3335
Ricavision	1272
Roku	3061
Seagate	2698
Sling Media	5295, 3778
Sony	5724, 2713, 1272

Stack 9	1272
Systemax	1272
Tagar Systems	1272
Technicolor	5295
Tibo	4339
Toshiba	1272
Touch	1272
Vensmile	4899
Viewsonic	1272
VIZIO	3670
Voodoo	1272
Western Digital	2558
Xbox	4000, 2049, 1272
Xiaomi	3982
ZT Group	1272

**STB**

3 Rivers Telephone Cooperative	1376, 4437
702 Communications	0775
Accelplus	1376, 1877, 1982
Access Cable Television	1376, 1877, 1982
Access Communications	1376, 2187, 4537
Access Montana	1998, 2254, 3028, 3426, 3605
Ace Communications	2254
Acira	3605, 1376, 1877, 1982
ACME Communications	2254
ACTV Cablevision	1376, 1877, 1982
Adak Cablevision	1376, 1877, 1982
Adams Cable TV	1376, 4079
AdamsWells	4437
ADB	2586, 2254, 1481, 1998, 2302, 3028
Advanced Broadband	1376, 1877, 1982
Advanced Cable Communications	4079
Advanced Telemedia	1376, 1877, 1982
Advocate Communications	1376, 1982
AEBC	1998, 2254, 3028, 3426, 3605
Airwave Networks	1376, 1877, 1982
Alabama Broadband	1376
Algona Municipal Utilities	1376, 1877, 1982
Alf West Communications	1376
Alleghany Cablevision	1376, 1877, 1982
Alliance Communications	1376
Alliance Communications	1376
Allied Telesis	1376, 1877, 1982
Allo Communications	1481, 1998, 2302, 2482, 3028
Alma Municipal Cable	1376, 1877, 1982
Almega Cable	1376, 1877, 1982
Alpine Cable	1376, 1877, 1982
Alsea River Cable	1376, 1877, 1982
Alta Utilities	1877
Altatec	1877
Alternative Cable	1376, 1877, 1982
Altice USA	1376, 1877, 3885, 3560, 1982
Altitude Communications	1376
American Broadband	1376, 1877, 1982

American Broadband Missouri	1376, 1877, 1982	Barbourville Utility Commission	1376, 1877, 1982
American Entertainment Network	1376, 1877, 1982	Bardstown Cable	1376, 1877, 1982
American Telecasting	1376, 1877, 1982	Bascom Communications	1376, 1877, 1982
American Warrior Networks	1376, 1877, 1982	Base Cablevision	1376, 1877, 1982
Amherst Telephone	1376, 1877, 1982	Bay Cablevision	1376, 1877, 1982
Amino	1615, 1481, 1898, 3605, 2482, 2302, 1998, 3028, 3426, 4437	Bay City Cablevision	1376, 1877, 1982
Andrew Telephone	1998, 2254, 3028, 3426, 3605	Bay Country Communications	1376, 1877, 1982
Anne Arundel Broadband	1376, 3560	Bay Creek Communications	1376
Antenne TV de St-Zacharie	1376	Bayland Communications	2586
Antietam Cable	1376, 1877, 1982	Bayou Cable	1376, 1877, 1982
Arc One	1376, 1877, 1982	Beamspeed	1376, 1877, 1982
Arctic Cooperatives	1376, 1877, 1982	Beaver Creek Telephone	1877, 1982
Argent Communications	1376, 1877, 1982	Beaver Valley Cable	1951, 1376, 1877, 1982
Arialink Broadband	1376, 1877, 1982	Beck's Cable Systems	1376, 1877, 1982
Arkwest	1481, 2482, 1998, 2302, 3028	Bee Line Cable	1376
Arledge Electronics	1376, 0775	Beehive Broadband	1376, 1481, 1982, 1998, 2302, 2482, 3028
Arlington TV Cooperative	1376, 1877, 1982	BEK Communications	2254, 2302
Armstrong	1376, 3560	BELD Broadband	1376, 1877, 1982
Arris	1376, 2378, 1982, 1998, 2187, 5912, 0869, 1877, 5097, 0858, 5537, 5942	Belhaven Cable TV	1376, 1877, 1982
Arthur Mutual Telephone	1376, 1877, 1982, 1998, 2254, 3028, 3426, 3605	Bell	0775, 1998, 5537, 1877, 5097
Arvig Communication Systems	1376, 1982, 1998, 2345	Bell Aliant	1998
Ashland Home Net	1376, 1877, 1982	Bell Fibe TV	1998, 5097, 5537
Askivision Systems	1376, 1877, 1982	Bell MTS	1998, 5097, 5537, 1951
Astrea	1376, 1877, 1982	Bell Satellite TV	0775
AT&T	1377, 0858	Bellaire Cable	1376, 1877, 1982
AT&T U-verse	0858	Bellevue Cable	1376, 1877, 1982
ATC Communications	1376, 1951, 3560	Belzoni Cable	1376, 1877, 1982
ATI Networks	1376, 1877, 1982	Ben Lomand TV	2254, 2302
Atlantic Broadband	1376, 1877, 1982, 3560, 4079	Bend Broadband	1376, 2187, 4079
ATMC	1376, 1982, 3028, 1998	Bentleyville Cable	1376, 1877, 1982
Atwood Cable	1376, 1877, 1982	Benton Cooperative Telephone	1376, 1877, 1982
Aurora by Hickory Telephone	1998, 2254, 3028, 3426, 3605	Benton County Cable	1376, 1877, 1982
Aurora Cable TV	1376, 1877, 1982	Beresford Cablevision	1376, 1877, 1982
Axtel	4458	Berkshire Cable Corp	1376, 1877, 1982
Ayersville Communications	1998, 2254, 3028, 3426, 3605	Bernard Telephone & Communications	2254
Ayrshire Communications	1376, 1877, 1982	Beulah Cable TV	1376, 1877, 1982
B & C Cablevision	1376, 1877, 1982	Bevcomm	1951, 1898, 1615
B & L Technologies	1376, 1877, 1982	Beyond Communications	1376, 1877, 1982
Bagley Cable TV	1376, 1877, 1982	BGTCO	1898, 3605
Bailey Cable TV	1376, 1877, 1982	Big Sandy Broadband	1376, 1877, 1982
Baldwin County Internet	1376, 1877, 1982	Biltmore Communications	1376, 1877, 1982
Baldwin Lightstream	1877, 3560	Blakely Cable Television	1376, 1877, 1982
Baldwin Telecom	1877, 3560	Bledsoe Telephone Cooperative	1481, 1998, 2254, 2302, 2482, 3028
Ballard Rural Telephone Cooperative	0775, 2302, 2586	Block Communications	1376
		Bloom Broadband	0775
		Bloomingdale Communications	1481, 1998, 2302, 2482, 3028
		Blue Mountain TV Cable	1376, 1877, 1982
		Blue Ridge Communications	1877, 3560
		Blue Sky Cable	1376, 1877, 1982
		Blue Stream	1376, 3560
		Blue Valley Telecommunications	1898, 3605

BlueBridge Media	1376, 1982	Cable America	1376
Bluewave Communications	3426	Cable Amos	1376
Bobcaygeon Cable	1376, 1877, 1982	Cable Axion Digital	1376
BOLT Fiber Optic Services	1998, 2254, 3028, 3426, 3605	Cable Cable	1877
Booher Brothers Cable	1376, 1877, 1982	Cable Communications of Willsboro	1376, 1877, 1982
Bowen Cablevision	1376, 1877, 1982	Cable Cooperative	1376, 1877, 1982
Bowling Cable TV	1376, 1982	Cable Development Corporation	1376, 1877, 1982
Boycom Cablevision	1376	Cable Management Association	1376, 1877, 1982
Branch Cable	1376, 1877, 1982	Cable Montana	1376, 1877, 1982
Brandenburg Telecom	1481, 1998, 2302, 2482, 3028	Cable Nebraska	1376, 1877, 1982
Brandywine Cablevision	1376, 1877, 1982	Cable Of The Carolinas	1376, 1877, 1982
Brantley Telephone Company	1898	Cable One	1376, 3560, 1877
Bresnan	1376, 1877	Cable Plus	1376, 1877, 1982
Briand et Moreau Cable	1376, 1877, 1982	Cable Suite	1376
Bridger Cable TV	1376, 1877, 1982	Cable Systems of Nevada	3605
Bright Green Communications	1376, 1877, 1982	Cable Tech Cable TV	1376, 1877, 1982
Bright House	1877, 1376, 3294, 4537	Cable TV of Camrose	1376
Bright House Networks	1877, 1376, 3294, 4537	Cable TV of East Alabama	1376, 1877, 1982
Bristol Tennessee Essential Services	1877, 1998, 2378	Cable TV of Slave Lake	1376, 1877, 1982
Bristol Virginia Utilities	1376, 1877, 1982	Cable TV of St. Paul	1376, 1877, 1982
British-American Cable	1376, 1877, 1982	Cablecom Mexico	1376
Broadstar Communications	1376, 1877, 1982	Cablemás	1376, 1877
Broadstripe	1376, 3560	Cablenet	1376, 1877, 1982
Brockway Television	1376, 1877, 1982	CableSouth Media	1376, 1877, 1982
Broken Bow Cable TV	1376, 1877, 1982	Cableview Communications	1376, 1877, 1982
Brooke Telecom	3426, 1898, 3605	Cablevision	3885, 1376
Brooks Bay Cable	1376, 1877, 1982	Cablevision du Nord	1376
Brownwood TV Cable Service	1376, 1877, 1982	Cablevision of Marion County	1376
Bruce Telecom	3426	Cablevision T.R.P.	1376, 1877, 1982
Bryan Municipal Utilities	1376, 1877, 1982	Cablevision Victoria	1376, 4375, 4537
BTC Broadband	2254, 2586	Cablevisión Mexico	1376, 4375, 4537
Buckeye Broadband	1376, 1877, 2187, 4079	CalNeva Broadband	1376, 1877, 1982
Buckeye Cable System	1376, 1877, 2187, 4079	CalTel Connections	2254, 2586
Buckland Telephone Company	1998, 2254, 3028, 3426, 3605	Camellia Communications	1376, 1877, 1982
Buford Media Group	1376, 1982	Cameron Communications	1376, 1877, 1982
Bulldog Cable	1376, 1877, 1982	CAMS Cable	1376, 1877, 1982
Bulloch Telephone Cooperative	1376, 1877, 1982	Canaan Cable	1376, 1877, 1982
Burgeo Broadcasting System	1376, 1877	Canadian Valley Telephone	1998, 2254, 3028, 3426, 3605
Burke's Garden Telephone Company	1898, 3605	Canby Telcom	1481, 2302
Burlington Telecom	1481, 1615	Cannon Valley Cablevision	1481, 1998, 2302, 2482, 3028
Butler Bremer Mutual Telephone	1898	Caprock TV	1376, 1877, 1982
BVU Optinet	1376, 1877, 1982, 1998, 2254, 3028, 3426, 3605	Cardinal Cable Stanford	1376, 1877, 1982
BWTelcom	1376, 1982	Carnegie Cable	1376, 1877, 1982
Byron Cable TV	1376, 1877, 1982	Carolina Mountain Cable	1376, 1877, 1982
C & W Cable	1376, 1877, 1982	Carr Communications	1376, 1877, 1982
C Spire	3605	Carrell Communications	1376, 1877, 1982
C.L. Davis Cable Services	1376, 1877, 1982	CAS Cable	1376
Cable & Communications	1376	Cascade Communications	1376, 1877, 1982
		Cascade Networks	1998, 2254, 3028, 3426, 3605
		Casey Cable	1376, 1877, 1982
		Caspian Community TV	1376, 1877, 1982
		Cass Cable	1376
		Castle Cable Service	1376, 1877, 1982
		Catalina Cable	1376, 1877, 1982
		Catawba Services	1376, 1877, 1982
		CATC	1376, 1877, 1982
		CBN	1376, 1877, 1982
		CBPU Cable	1376, 1877, 1982

CC Communications	1998, 2254, 3028, 3426, 3605	Citizens Cable	1376, 1481, 2254, 2482
CCAP	1877	Citizens Cable TV	1376
CDE Lightband	1998, 0858, 1615, 2254, 2586	Citizens Cablevision	1481, 2482
Cedar Falls Utilities	1376, 1951	Citizens Fiber	1376, 1877, 1982
Celect Communications	1376, 1877, 1982	Citizens Mutual Telephone	1376, 1877, 1982
Cellcom	1376, 1481, 1982, 1998, 2302, 2482, 3028	Citizens Telecom	1376, 1877, 1982
Cencom	1376, 1877, 1982	Citizens Telephone	2254, 2586
CentraCom Interactive	1376, 1877, 1982	City Cablevision	1376, 1877, 1982
Central Arkansas Telephone Cooperation	3605	City of Barnesville Cable	1376, 1877, 1982
Central Arkansas Telephone Cooperative	1376, 1877, 1982	City of Baxter Springs Cable	1376, 1877, 1982
Central Scott Telephone	1376, 1877, 1982, 1998, 2254, 3028, 3426, 3605	City of Bellevue Cable	1376, 1877, 1982
Central Texas Communications	1376, 1877, 1982	City of Cawker City Cable	0775
Central TV & Internet	1376, 1877, 1982	City of Fort Yukon Cable	1376, 1877, 1982
Central Valley Cable	1376, 1877, 1982	City of Hawarden Cable	1376, 1877, 1982
Centre TV Cable	1376, 1877, 1982	City of Norway Cable	1376, 1877, 1982
Centrovision	1376, 1877, 1982	City of Quitman Cable	1376, 1877, 1982
Century Communications	1376, 1877, 1982	City Of Salisaw	1376
Century Telephone	1376, 1877, 1982	City of Sumas TV Cable System	1376, 1877, 1982
CenturyLink	1998, 0858	City West	1376
CenturyTel TeleVideo	1376, 1877, 1982	Clarence Telephone	1376, 1877, 1982
Chambers Cable	1376	Clear Creek Communications	1376
Champion Broadband	1376, 1877, 1982	ClearChoice Communications	1376, 1982
Channel Master	3118	Clearview Cable	1376, 1877, 1982
Chaparral Cablevision	1376, 1877, 1982	Clearview Partners	1376, 1877, 1982
Chariton Valley Communications	1376, 1877, 1982	Clearview TV Cable	1376, 1877, 1982
Charter	1877, 1376, 2187, 3560, 3294, 4537	Clearvision Cable TV	1376, 1877, 1982
Charter Spectrum	1877, 1376, 2187, 3560, 3294, 4537	Click Network	1376, 1982
Chatmoss Cablevision	1376, 1877, 1982	ClickOne	1376, 1877, 1982
Chequamegon Telephone Cooperative	1898, 1615, 2254, 2302	Clinton Cable	1376, 1877, 1982
Cherokee Broadband	1376, 1877, 1982	CLT Communications	1376, 1877, 1982
Chesnee Communications	1376, 1877, 1982	CLTel	1376, 1877, 1982
Chester Telephone	1376	CMA Communications	1376
Chickamauga Telephone Corporation	1998, 2254, 3028, 3426, 3605	CML Telephone Cooperative	1376, 1877, 1982
Chinook Progressive Club TV	1376, 1877, 1982	CNS Television	1376, 1877, 1982
Chippewa Valley Cable	1376, 1877, 1982	Co-Mo Connect	3426
Choice Cable TV	1376, 1877, 1982	Coast Cable Communications	1376, 2187
Choice Communications	1376, 1877, 1982	Coast Cablevision	1376, 1877, 1982
Choice Television	1376, 1877, 1982	Coast Communications	1376
Christy Cablevision	1376, 1877, 1982	Coastal Link	1376
CimTel	1376, 1951	Coaxial Cable TV	1376, 1877, 1982
Cincinnati Bell	1376, 1877	Cobalt TV	1898
CIPi Cable	1376	Cobridge	1376
Circle Bar Cable Television	1376, 1877, 1982	Cobridge Communications	1376
Cisco	1877, 1982, 2947, 0858, 3028, 2345, 2378, 5912, 1998, 4315, 3294, 4374, 5484, 2826, 4450, 4514, 5942	Cochrane Co-op Telephone	1998, 2254, 3028, 3426, 3605
		CochraneTel	3426, 4437
		Cogeco	1376, 1982, 3560, 4537
		Colane Cable TV	1376, 1877, 1982
		Coldwater Board of Public Utilities	1376, 1877, 1982
		Colfax Highline Cable	1376, 1877, 1982
		Collinsville Cable	1376, 1877, 1982
		Colonial Cablevision	1376, 1877, 1982
		ColtonTel	1376, 2378
		Columbia Power and Water	1376, 1877
		Columbus Telephone	1376
		Com-Link	1376, 1877, 1982
		Comcast	1982, 1376, 1877, 3560, 2187, 4079, 4443, 4537
		CommStream	1998, 2254, 3028, 3426, 3605

Communication 1 Cablevision	2302	Coopérative Câblodistribution	
Communication Services	1376, 1877, 1982	Notre-Dame-des-Monts	1376
Communication Stratford	1376	Coosa Cable	1376
Communicomm	1376, 1877, 1982	Copper Mountain Metropolitan	
Community Antenna Service	1376, 1877, 1982		1376, 1877, 1982
Community Antenna System	1376, 1877, 1982	Corn Belt Telephone	1376, 1982
Community Cable & Broadband		Country Cable	1376, 1877, 1982
	1376	Country Cable TV	1376, 1877, 1982
Community Cable Service	1376, 1877, 1982	Country Cablevision	1376
Community Communications	1376, 1877, 1982	Country Cablevision Ltd.	1376
Community Fiber Solutions	1998, 2254, 3028, 3426, 3605	Country Vision Cable	0775, 0869
Community Telecom	1376, 1877, 1982	Cowley Telecable	1376, 1877, 1982
Community Telecom Services		Cox	1376, 1982, 1877, 4315, 3774, 3560
	1376, 1877, 1982	Cox Communications	1376, 1982, 1877, 4315, 3774, 3560
Community Television	1376, 1877	CP-Tel	1615, 1898, 2254
CommZoom	1376, 1877, 1982	CPWS	1376, 1877
Compagnie de Téléphone de Saint-Victor		Craig Cable TV	1376, 1877, 1982
	3605	Craw-Kan Telephone Cooperative	
Compas Cable	1376, 1877, 1982		2254, 2586
Complete Communication Services		Crestview Cable	1376, 1877, 1982
	1376, 1877, 1982	Cross Country TV	1376, 1877, 1982
Comporium	1877, 3560, 2187	Cross Telephone	1998, 2254, 3028, 3426, 3605
Compton Communications	1376	Crosslake Communications	1376, 1877, 1982
Comserv	1376, 1877, 1982	Crossman Cable	1376, 1982
ComSouth	1376, 1877, 1982	Crow Cable TV	1376, 1877, 1982
ComSpan Communications	1481, 1898	CRRS-TV	1376
Comstar Cable TV	1376, 1877, 1982	CRST Telephone Authority	1481, 1998, 2254, 2302, 2482, 3028
Concept Communications Corporation		Crystal Broadband Networks	1376, 1877, 1982
	1376, 1877, 1982, 1998, 2254, 3028, 3426, 3605	Crystal Cable TV	1376, 1877, 1982
Consolidated Cable	1376, 1877, 1982	CSI Cable	1376, 1877, 1982
Consolidated Communications		CT & R Cable	1376, 1877, 1982
	1877, 1998, 2187, 1376, 3426, 3605, 0858, 1481, 1898, 1951, 2254, 2302, 2482, 2586	CTC	1376, 1998, 3028
Consolidated Telcom	1376	CTV Beam	1376, 1877, 1982
Consolidated Telecommunications Company	1376, 1998, 3028	CumbyTel	1998, 2254, 3028, 3426, 3605
Continuum	1376, 1877, 1982, 2187	Cunningham Telephone & Cable	
Conuma Cable Systems	1376, 1877, 1982		1376, 1951, 2187
Conway Corporation Cable TV		Curtis Cable TV	1376, 1877, 1982
	1376, 1877, 1982, 2187	Custer Telephone Cooperative	
Conxxus	1376, 1877, 1982		1376, 1877, 1982
Coon Creek Telephone	1376, 1951, 2254, 3118	CUTV	1376, 1877, 1982
Coon Rapids Municipal Utilities		CWA Cable	1376, 1877, 1982
	1376, 1877, 1982	Câble F.B.	1376, 1877
Coon Valley Telephone	2254, 3118	Câblodistribution Ste-Hedwidge	
Coop Câblo Leeds	1376, 1877		1376, 1877
Coop Câblodistribution de L'Isle-aux-Coudres	1376	Câblovision Warwick	1877, 2947
Coop de Câblodistribution Sainte-Agathe	1376	D & D Cable Systems	1376, 1877, 1982
Coop de Câblodistribution Ste-Catherine-Fossambault		D & P Communications	1376, 1951
	1376	Dairyland Cable Systems	1376, 1877, 1982
Cooperative Television Godahl		Dais Digital Cable	1376, 1877, 1982
	1376, 1877, 1982	Dakota Central Telecommunications	
			2345
		Dalton Cable Television	1877, 1982
		Dalton Utilities	1877, 1982
		Darien Communications	1376, 1982
		Davis Communications	1376, 1877, 1982
		Dawson City Television	1376, 1877, 1982
		DCA Cablevision	1376, 1877, 1982
		DDD Cablevision	1376, 1877, 1982
		Dean Hill Cable	1376, 1877, 1982
		Dean's Cablevision	1376, 1877, 1982

Decca Cable	1376, 1877, 1982	Entone	3426, 2302, 1615, 1898, 4437
Deffner Cable TV	1376, 1877, 1982	EnTouch	1376
Delcambre Communications	1898, 3605	EPB of Chattanooga	0858
Delhi Telephone	1376, 1877, 1982	EPlus Broadband	1376, 1877, 1982
Delta Cable	1376	Escape Broadband	1376, 1877, 1982
Demopolis CATV	1376, 1877, 1982	Eston CATV Cooperative	1376, 1877, 1982
Denali TV	1376, 1877, 1982	ETAN Industries	1376, 1877, 1982
Dery Telecom	1376, 1877	ETC Communications	1376
DiamondNet	1376	Etex	2586, 2302
Dickey Rural Networks	1376, 1877, 1982	Evertex	2302
Diffusion Vermont	1376	Evolution	2479, 4079, 2746, 4315, 3560
Digeo	2187	Evolution Digital	2479, 4079, 2746, 4315, 3560
Diode Communications	1376, 1877, 1982	ExecuLink Telecom	1376, 3426
DirectLink	3605, 1481, 2302	Eyecom	1376, 1877, 1982
DIRECTV	1377, 3724, 6268	F & B Communications	2254, 2586
DISH	0775	F & B Telephone	2254, 2586
DISH Network	0775	FairPoint Communications	1376, 1982
Dishpro	0775	Falcon Broadband	1376, 1877, 1982
Diverse Communications	1898, 1982	Falls Earth Station	1376, 1877, 1982
Dixie Cable TV	1376, 1877, 1982	FamilyView Cablevision	1376, 1877, 1982
Dixon Telephone	1376, 1877, 1982	Fannettsburg Cable TV	1376, 1877, 1982
DMS Cable	1376, 1877, 1982	Farmer & Merchant Mutual	1376, 1877, 1982
Docomo Pacific	3560	Farmer's Telephone Cooperative	1998, 3028
Downsville Community Antenna	1376, 1877, 1982	Farmers Cooperative Telephone Company	1376, 1877, 1982
Doylestown Cable TV	1376, 1877, 1982	Farmers Independent Telephone	1376, 1877, 1982
Drummond Cable TV	1376, 1877, 1982	Farmers Mutual Telephone	3605, 1376, 1877, 1982
DTC	1376, 1877, 1982	Farmers Telecommunications Cooperative	3028
Dumont Telephone	1376, 1877, 1982	Farmtel Communications	1376, 1877, 1982
Duncan Cable TV	1376, 1877, 1982	FCNQ	1376
Dunkerton Communications	1998, 2254, 3028, 3426, 3605	Federated Telephone	1376
Duo County Telecom	2254	Fenton Cablevision	1376, 1877, 1982
E+ Broadband	1376, 1877, 1982	FiberCast Cable Communications	1376, 1877, 1982
E.Com	1376, 1877, 1982	FiberFlex Media	2254, 3605
Eagle Broadband	1481, 1998, 2254, 2302, 2482, 3028	FiberNet Monticello	1376, 1877, 1982
Eagle Cablevision	1376, 1877, 1982	Fibrant	1376, 1877, 1982
Eagle Communications	1376, 2187	Fidelity Communications	1376
Eagle Valley Telephone	1481, 1998, 2302, 2482, 3028	First Cable Of Missouri	1376, 1877, 1982
EagleVision Wireless TV Services	1376, 1877, 1982	FirstMile	1376, 1877, 1982
East Arkansas Video	1376	FirstMile Technologies	1376, 1877, 1982
East Cleveland Cable	1376, 1877, 1982	Flint Cable TV	1376, 1877, 1982
East Texas Cable	1376, 1877, 1982	Florida Cable	1376, 1877
Eastern Cable	1376, 1877, 1982	Foothills Broadband	1877
EastLink	1376, 2187	Foresite Wireless	1376, 1982
EasyTEL	1481, 1998, 2302, 2482, 3028	Forsyth CableNet	1376, 1877, 1982
EATEL	1877, 3028	Fort Jennings Communications	2586
Echostar	0775	Fort Randall Telephone Company	1376, 1982
ElbertonNet	1376, 1877, 1982	Fort Towson Cable	1376, 1877, 1982
Electron Enterprises	1376, 1877, 1982	Fosston Cable TV	1376, 1877, 1982
Elk River Cable TV	1376, 1877, 1982	Foster Communications	1376, 1877, 1982
Elkhart TV Cable	1376, 1877, 1982	Frank Howard TV Cable	1376, 1877, 1982
Ellsworth Cooperative Telephone Association	3605	Frankfort Plant Board Cable	1376
Emery Telcom Video	1376, 1877, 1982	Franklin Telephone Company	1376, 1877, 1982
Emily Coop Telephone	1481, 1615, 3605	Frontier	2378, 1998, 3560, 0775
Empire Access	1898, 4437		
Endeavor Communications	2254, 2586, 3426		
Enhanced Telecommunications	1376, 2254		

Frontier Communications	2378, 1998, 3560, 0775	Grantsburg Telcom	1376, 1877, 1982
FTC	1982, 1376, 1877	Great Plains Communications	1376
Full Channel TV	1376, 1877, 1982	GreatWave Communications	1376, 1877, 1982
Full Choice Communications	1376, 1877, 1982	Green Hills Communications	1376, 1877, 1982
Fusion Broadband	1376, 1877, 1982	Greene County Cable TV	1376, 1877, 1982
Futuristic Cablevision	1376, 1877, 1982	Greenfield Communications	1376, 1982, 0775
Fédération des coopératives du Nouveau-Québec	1376	Greenlight Community Broadband	1376, 1877, 1982
Gainesboro CATV	1376, 1877, 1982	Gridley Cable	1376, 1877, 1982
Galaxy American Communication	1376, 1877, 1982	Griswold Cooperative Telephone	1481, 1998, 2254, 2302, 2482, 3028
Galaxy Cable	1376, 1877, 1982	Grove Cable	1376, 1877, 1982
Gamewood	2254, 3605	Grundy Center Utilities	1376, 1877
Garden Valley Technologies	1376, 1877, 1982	GTA Digital TV	2345
Garden Valley Telephone	2302	GTel	1898, 3605
Gardonville Cooperative Telephone	0775, 1998, 2302	GTI	1481, 1998, 2302, 2482, 3028
Gatehouse Networks	1376, 1877, 1982	Guadalupe Valley	1877, 2187
Gauthier Cablevision & Electric	1376, 1877, 1982	Guy Chouinard Câble/TV	1376
GCI	3560, 1376, 1877	GVTC	1877, 2187
General Communications	3560, 1376, 1877	H & B Cable Service	2482
Genext	1376, 1877, 1982	Haefele TV	1376, 1877, 1982
Genuine Telecom	2254	Haines Cable TV	1376, 1877, 1982
Geraldine Cable TV	1376, 1877, 1982	Hall Beach Cooperative	1376, 1877, 1982
Get Real Cable	1376, 1877, 1982	Halstad Telephone Company	3028
GEUS	1376, 1877, 1982, 3560, 4079	Hamilton County Cable TV	1982, 1376, 1877
Giant Communications	1376, 1877, 1982	Hancel	1376, 1877, 1982
GiCable	1376	Hancock Telecom	2254
Gigabit Minnesota	1998, 2254, 3028, 3426, 3605	Hanson Communications	1376, 1877, 1982
Giles-Craig Communications	1376, 1877, 1982	Hardy Telecommunications	3605
Gilmer Cable Television	1376, 1877, 1982	Hardy TV	3605
Glandorf Telephone	1481, 1615, 1898, 2254, 2586	Hargray	1877, 1376, 1982
Glasgow Electric Plant Board	1376, 1877, 1982	Harlan Community TV	1376
Glass Antenna Systems	1376, 1877, 1982	Harlan Municipal Utilities	1376
Glenwood Telecommunications	1376	Harmony Cable TV	1376, 1877, 1982
Glide Cablevision	1376, 1877, 1982	Harris Broadband	1376
Globalcom	1376, 1877, 1982	Harrisonville Telephone	2254, 2586
Golden Belt Telephone	2254, 2586	Harron Metrocast	1376, 1877
Golden Communications	1376, 1877, 1982	Hart Cable	1376, 1877, 1982
Golden Rain Foundation	1376, 1877, 1982	Hart Electric	1376, 1877, 1982
Golden Valley Cable	1376, 1877, 1982	Hart Telephone Company	1376
Golden West Telecommunications	1376, 1877, 1982	Hartelco	1376, 1877, 1982
Goldfield Communications	1376, 1877, 1982	Hastings Cable Vision	1376, 1877, 1982
Google	3666	Hawaiian Telcom	3028
Google Fiber	3666	Hawarden HITEC Cable	1376, 1877, 1982
Gorge Networks	1376, 1877, 1982	Hawkeye Telephone Company	1376, 1877, 1982, 1998, 2254, 3028, 3426, 3605
Gorham Communications	1481, 2482	Hay Communications	3426
Gosfield North Communications	1998, 2254, 3028, 3426, 3605	Hayneville Telephone Company	1998, 2254, 3028, 3426, 3605
Gowrie Cablevision	1376, 1877, 1982	HBC	1376, 1877, 1982
Grafton Cable Communications	1376, 1877, 1982	HBL Communications	1376, 1877, 1982
Grand Mound Cooperative Tel	1998, 2254, 3028, 3426, 3605	HCS	1376, 1877, 1982
Grand River Cable	1376, 1877, 1982	Healthcare Cable Systems	1376, 1877, 1982
Grande Communications	1877, 3560, 1376	Heart of Iowa Communications	1376, 1877, 1982
		Heartland Cable	1376, 1877, 1982
		Heartland Technology	1376, 1877, 1982
		Heartland Wireless Communications	1376, 1877, 1982
		Heck's TV & Cable	1376, 1877, 1982



Henderson Telephone	1376, 1877, 1982	Index Cable TV	1376, 1877, 1982
Hermosa Cablevision	1376, 1877, 1982	IndyTel	1376, 1877, 1982
Herr Cable	1376, 1877, 1982	Innovative Cable TV	1376
HFU Television	1376, 1877, 1982	Innovative Systems	1376, 1898
Hiawatha Broadband	1376, 1877, 1982	Inside Connect Cable	1376
HickoryTech	1898, 1951, 2302	Integra Telecom	2345
High Plains Cablevision	1376, 1877, 1982	Intelliwave	1998, 2254, 3028, 3426, 3605
Highland	1877, 1376, 1982	Inter Mountain Cable	1877, 2479, 4079, 2826, 3294
Highland Telephone Cooperative	1877, 1376, 1982	Inter-County Cable	1376, 1877, 1982
Hightong	1376	Interstate Cablevision	1481, 1998, 2254, 2302, 2482, 3028
Hill Top Communications	1376, 1877, 1982	Interstate Telecommunications Cooperative	2254, 2302
Hillsboro Telephone	1998, 2254, 3028, 3426, 3605	Intertech Private Cable	1376, 1877, 1982
Hinton CATV	1376, 1877, 1982	InTouch	1998, 2254, 3028, 3426, 3605
HLM Cable Corp	1376, 1877, 1982	Iowa Network Services	2302
Home Communications	1376, 1877, 1982	Iron River Cooperative TV	1376, 1877, 1982
Home Telecom	1376, 3426, 4437	Irvine Community TV	1376, 1877, 1982
HomeTel	1376	Izzi Mexico	1376, 6195, 4375, 4537
Hometown Cable	1376, 1877, 1982	Izzi Telecom	1376, 6195, 4375, 4537
Hometown Utilicom	1376, 1877, 1982	J & L Cable	1376, 1877, 1982
Hood Canal Cablevision	1376	J & N Cable	1376, 1877, 1982
Hoonah Community Television	1376, 1877, 1982	Jack McClanahan Cable TV	1376, 1877, 1982
Hooper Telephone	1376, 1877, 1982	Jackson Energy Authority	1376, 1877, 1982
Horizon Cable TV	1376, 2254, 2586	Jaguar Communications	1376, 1877, 1982
Horizon Telecom	2254, 2586	James Cable Partners	1376, 1877, 1982
Horry Telephone Cooperative	1376, 1877, 1982	James Valley Cooperative Telephone	2254, 2586
Hospers Telephone	1376, 1877, 1982	Jayroc Cablevision	1376, 1877, 1982
HOT - Homeland Optical Technology	1376, 1877, 1982	Jefferson County Cable	1376, 1877, 1982
Hotwire	2254, 2586	Jefferson Telecom	1376, 1877, 1982
Houston Cable	1376, 1877, 1982	Jeffersonville Cable TV	1376, 1877, 1982
HTC Communications	1481, 1998, 2302, 2482, 3028	Jerrold	0869
HTC Services	1376, 1877, 1982	Jet Broadband	1376
HTS	0775	Johnston County Cable	1376, 1877, 1982
Huawei	4589, 1982, 4883	Journeyvision Cable	1376, 1877, 1982
Hughes Network Systems	1377	JVC	0775
Humax	1377, 1877, 3560	K-Communications	1376, 1877, 1982
HunTel Systems	1376	K2 Communications	3560
HuronTel	3426, 1898, 3605	Kalida Telephone	1376, 1877, 1982, 2254
Huxley Communications	1376, 1877, 1982	Kalona Cooperative Telephone	2254, 2586
Hydaburg Cable TV	1376, 1877, 1982	Kaltelco	1481, 1998, 2302, 2482, 3028
HYDE County Cablevision	1376, 1877, 1982	Kaon	2746, 4458
I-Speed	1376, 1877, 1982	Kaon Media	2746, 4458
I3 Broadband	1376, 1877, 1982	Kaplan Telephone	2254, 2586
ICE Cable Holdings	1376, 1951	Karban TV Systems	1376, 1877, 1982
ICS Communications	1376, 1877, 1982	KAS Cable TV	1376, 1877, 1982
ICSI Cable	1376	Kaslo Cable	1376, 1877, 1982
iFiber Communications	2254	Kawartha Cable	1376, 1998, 2254, 3028, 3426, 3605
IHR Telecom	3426, 4437	KBS Cable TV	1376
Ile-a-la-Crosse Communications Society Inc.	1376	Keene Valley Video	1376, 1877, 1982
Illini Cablevision Of Illinois	1376, 1877, 1982	Kelley Communications	1376, 1877, 1982
ImOn Communications	1877	Kennebec Telephone	1376, 1877, 1982
Indco Cable TV	1376, 1877, 1982	Kennedy Cablevision	1376, 1877, 1982
Independence County Cable	1376, 1877, 1982	Kentucky Ridge Country Communications	1376, 1877, 1982
Independence Light & Power	1376, 1877, 1982		
Independence Telecom Utility	1376, 1982		
Independent Cable Systems of Idaho	1376, 1877, 1982		
Indevideo	1376, 1877, 1982		

Keta Cable	1376, 1877, 1982	LightStream	1998, 2254, 3028, 3426, 3605
KFW Communications	1376, 1877, 1982	LigTel	1998, 2254, 3028, 3426, 3605
Kincardine Cable TV	1376	Limestone Cablevision	1376, 1877, 1982
Kings Bay Communications	1376, 1877, 1982	Lincoln Cable Television	1376
KLiP	1376, 1877, 1982	Lincolnvillle	1376
KM Telecom	1481	Lindsey Communications	1376, 1877, 1982
KoolConnect	1481	LISCO	1376, 1877, 1982
Koomiut Cooperative	1376, 1877, 1982	Litestream Holdings	1376, 1877, 1982
KPU Telecommunications	1615, 1898, 2302, 3426, 3605	LivCom	1998, 2254, 3028, 3426, 3605
Kraus Electronic Systems	1376, 1877, 1982	Livingston Communications	1998, 2254, 3028, 3426, 3605
Kudzu Cable TV	1376, 1877, 1982	LNE Communications	1376, 1877, 1982, 3605
Kugluktuk Cooperative	1376, 1877, 1982	LNE Telco	1376, 1877, 1982, 3605
Kuhn Communications	1376, 1877	Localtel	1376, 1877, 1982
L & J Cable	1376, 1877, 1982	Lockesburg Cablevision	1376, 1877
La Harpe Communications	1376, 1877, 1982	LodgeNet	1376, 1877
La Harpe Video and Data Services	1376, 1877	Lodgenet Entertainment	1376, 1877
Lafayette Utilities System	1376, 1951, 1998	Lone Pine Cable TV	1376, 1877, 1982
Laguna Serrano Cable	1376, 1877, 1982	Longview Communications	1376, 1877, 1982, 4079
Lake Cable	1376, 1877, 1982	Lonsdale Video Ventures	1481, 1998, 2254, 2302, 2482, 3028
Lake Connections	1898, 3605	Loretel Cablevision	1376, 1877, 1982
Lake Las Vegas Communications	1376, 1877, 1982	Loretel Systems	1376
Lake Livingston Telephone	1998, 2254, 3028, 3426, 3605	Lost Island Cable TV	1376, 1877, 1982
Lake Region Technology & Communications	3426, 4437	LPC Connect	1898
Lakeland Cablevision	1376, 1481, 1877, 1982, 1998, 2254, 2302, 2482	Lucas Valley Cable	3560
Lakeland Telecom	1481, 1998, 2254, 2302, 2482, 3028	Lumos Networks	1998, 3028
Lakeview Cable	1376, 1877, 1982	LUS Fiber	1998, 3028
Lamont Digital Systems	1376, 1877, 1982	Lycum Communications	1376, 1877, 1982
LaMotte	1998, 2254, 3028, 3426, 3605	M-Tek Systems	1376, 1877, 1982
Lang	1376, 1877, 1982	M.T.C. Cable	1376, 1877, 1982
Lansdowne Telephone	1998, 2254, 3028, 3426, 3605	Maddock Cable TV	1376, 1877, 1982
Laurel Highland	1376, 1877, 1982, 2187	Madison Communications	1376, 1982
Laurens Municipal Cable TV	1376, 1877, 1982	Madison County Cable	1376, 1877, 1982
LaValle Telephone Cooperative	2254, 2586	Mahaska Communications	1376, 1877, 1982
Layer3 TV	5370, 1998	Mainstreet Communications	1376, 1877, 1982
LB Cable	1376, 1877, 1982	Maitland Cable TV	1376, 1877, 1982
Lehigh Valley Cooperative Telephone	1376, 1877, 1982	Mallard Cable	1376, 1877, 1982
Lemonweir Valley Telephone	1481, 1998, 2302, 2482, 3028	Manawa Telecom	2254, 2586
Lenox Municipal Cable	1376, 1877, 1982	Manning Municipal Utilities	1376, 1877, 1982
Levan Town Cablesystems	1376, 1877, 1982	Manti Telecom	1481, 1998, 2254, 2302, 2482, 3028
Lewiston Communications	1376, 1877, 1982	Mapleton Communications	1376, 1877, 1982
Lexcom Cable Services	1376, 1877, 1982	Marco Island Cable	1376, 1877, 1982
LG	1377	Markdale Cable TV	1376
LHTC	1376, 1877, 1982, 2187	Marne & Elk Horn Telephone	1376, 1877, 1982
LHTC Broadband	1998, 2254, 3028, 3426, 3605	Marquette-Adams Telephone	1376, 1877, 1982
Liberty Cablevision	1376	Martell Cable	1376, 1877, 1982
Liberty Communications	1481, 2254, 2302, 2586, 3605	Martelle Communications Cooperative	1376, 1877, 1982
Lighthouse.Net	1376, 1877, 1982	Mascon Cable	1376
		Maskatel	1898, 3605
		Masset-Haida TV Society	1376, 1877, 1982
		Massillon Cable	1376, 2187
		Master Vision Cable	1376, 1877, 1982

Matanuska Telephone Association	1481, 2254, 2482, 2586	Millennium Telecom	1481, 1998, 2302, 2482, 3028
Matrix Cablevision	1376, 1877, 1982	Millheim TV Transmission	1376, 1877, 1982
Mattawamkeag Cablevision	1376, 1877, 1982	Millington CATV	1376, 1877, 1982
Maxcom	1998	Minburn Communications	1481, 1998, 2302, 2482, 3028
MaxxSouth	1376	Minerva Networks	3118
McDonough Telephone Cooperative	1376, 1877, 1982	Minerva Valley Cable	1376, 1877, 1982
McKee TV Enterprises	1376, 1877, 1982	MINET	1877
McNabb Cable	1376, 1877, 1982	Minford Telephone Company	3426, 3605
MCTV	1376, 2187	Mitchell Telecom	1898, 2254, 2586, 3605
McVille Cable System	1376, 1877, 1982	MLGC	1376
Mechanicsville Telephone Company	1376, 1877, 1982	MLGC Cable TV	1376, 1877, 1982
Media Cast	1376, 1982	MM&G Enterprises	1481, 1998, 2302, 2482, 3028
Media One	1376, 1877, 1982	MMDS Wireless East	1376, 1877, 1982
Mediacom	1376, 3560, 1982, 1877	Mobius Communications	1376, 1877, 1982
Mediapolis Telephone	1376, 1982	Monroe Cablevision	1376, 1877, 1982
Mediastream	1376	Monroe Utilities	1376, 1877, 1982
Megacable	1376, 4374, 4450, 4514, 4375, 4537, 4883	Montana Opticom	1376, 1877, 1982
Merrimac Communications	1376	Montana Sky Networks	0775
Metlakatla Indian Community TV	1376, 1877	Moosehead Enterprises	1376, 1877, 1982
Metro Loop	3605	Mornington Communications	3426
MetroNet	1998, 0858	Morris Broadband	1376
Metropolitan Cable	1376, 1877, 1982	Morristown Utility Systems	1877
MGS Cablevision	1376, 1877, 1982	Mosaic Telecom	1376, 2586
MHTC	1481, 1998, 2254, 2302, 2482, 3028	Motorola	1376, 0869, 2378, 1998, 1951, 0858, 1982, 4375, 5097, 3469
Mi-Connection	1877	Moultrie Telecommunications	1376, 1877, 1982
Mlcom	1376, 1877, 1982	Mountain Shadows Cable TV	1376, 1877, 1982
Microwave Satellite Technologies	1481, 1998, 2254, 2302, 2482, 3028	Mountain Telecommunications	1376, 1877, 1982
Mid Century Telecom	1481, 1615	Mountain Telephone	1376, 1877, 1982, 3426, 4437
Mid Missouri Broadband & Cable	1376, 1877, 1982	Mountain Zone TV	1376, 1877, 1982
Mid Missouri Telephone	1376, 1877, 1982	Moxi	2187
Mid-Coast Cablevision	1376, 1877, 1982	Mt. Baker Cable	1376, 1877, 1982
Mid-Hudson Cable	1376	MTA	1481, 2254, 2482, 2586
Mid-Plains Rural Telephone Cooperative	3028	MTC Communications	1376, 1982
Mid-Rivers Communications	1376	MTC Mutual	2482
Mid-South Cablevision	1376, 1877, 1982	MTC Technologies	1376, 1982
Mid-State Community TV	3560	MTCO Communications	2254
Midamerican Cable Systems	1376, 1877, 1982	Mulberry Telecommunications	2254, 3426
Midco	1376, 1982, 3560, 2826, 4079	Multiband Cable	1376, 1877, 1982
Midcontinent Communications	1376, 1982, 3560, 2826, 4079	Municipality Cable Operator	1376, 1877, 1982
Midstate Communications	1376, 1877, 1982	Murphy Cable	1376, 1877
Midtel Cable TV	1376, 1877, 1982	Murray Electric System	1376, 1877, 1982
Milaca Local Link	1376, 1877, 1982	Muscatine Power & Water	1376, 3426, 3605, 4375
Milcom Cable	1376, 1877, 1982	N.W. Communications	1376, 1877, 1982
Milestone Communications	1982, 0775	Natco Communications	1998, 2254, 3028, 3426, 3605
Milford Cable TV	1376, 1877, 1982	National Cable	1376, 1877, 1982
Milford Communications	1376, 1877, 1982	Naujat Cooperative	1376, 1877, 1982
Milk River Cable Club	1376, 1877, 1982	NDC	1481, 1998, 2302, 2482, 3028
		Nebraska Central Telecom	1376, 1877, 1982

NEC	1377	North State Communications	0858, 3028
NEIT	1376, 1877, 1982	North Texas Broadband	1376, 1877, 1982
Nelson County Cablevision	1376, 1877, 1982, 3560	North Yellowstone Cable TV	1376, 1877, 1982
Nelsonville TV Cable	1376, 1877, 1982	Northeast Nebraska Telephone Company	1898, 3605
Nemont Communications	1376, 1877	Northern Cable Holdings	1376, 1877, 1982
NEMR Telecom	1898	Northern Lakes Cable TV	1376, 1877, 1982
NEOTech	4596	Northerntel	0775
New Century Communication	1376, 1877, 1982	Northland Cable TV	3560
New Day Broadband	1376, 1877, 1982	Northland Communications	1376
New England Cable	1376, 1877, 1982	Northpenn	2254, 2586
New Hope Telephone	2302	Northside TV	1376, 1877, 1982
New Jersey Broadband	1376, 1877, 1982	Northstar Broadband	1376, 1877, 1982
New Knoxville Cable Systems	1376, 1877, 1982	Northwest Communications	1376, 1877, 1982
New Lisbon Broadband and Communications	1998, 2254, 3028, 3426, 3605	Northwest Community	1877
New North Networks	1376, 1877, 1982	Northwest Telephone Cooperative	1376, 1877, 1982
New Paris Quality Cablevision	1376, 1877, 1982	NorthwestTel	1376
New Visions Communications	1376, 1877, 1982	Norvado	2254, 2302, 2586
New Windsor Telephone	1376, 1877, 1982, 2302	Norwood Light Broadband	1376
Newcastle Cablevision	1376, 1877, 1982	Nova Cable Management	1376, 1877, 1982
NewDawn Fiber	1998, 2254, 3028, 3426, 3605	Nova Cablevision	1376, 1877, 1982
Newpath Communications	1877, 1982	Novus	1376, 1877
NewWave Communications	1376, 2187	NPG Cable	1376
Nex-Tech	2482	Nsight	2254, 2302, 2345, 2586
NexGen	1376, 1877, 1982	NTC Cable Services	1376, 1877, 1982
NexHorizon Communications	1376, 1877, 1982	nTelos	1998
Nexicom Communications	1376, 1877, 1982	NTS Communications	1376, 1877, 1982
NextGen Communications	1376	NU Telecom	1998, 3028
NfinityLink Communications	1376, 1982	NuLink	1376, 1877, 1982
NFTC	1998, 2254, 3028, 3426, 3605	Nushagak Cooperative	1376, 1877, 1982
Niagara Community TV Cooperative	1376, 1877, 1982	Nuvera	1998, 3028
NICP	1998, 2254, 3028, 3426, 3605	NuVisions	0775
Nimpkish Valley Communications	1376, 1877, 1982	NVC	2254
NineStar Connect	2254, 3426, 4437	O-Net	1898, 3426, 3605
Nittany Media	1376, 1951	Oak Cable Systems Of Iowa	1376, 1877, 1982
NKTelco	3426, 1615, 1898, 1376	Oak Hill Cablevision	1376, 1877, 1982
Nor-Cal Cable Systems	1376, 1877, 1982	Oakview Cable	1376, 1982
Nor-Del Cablevision	3560, 2479	Oasis Communications	1376, 1877, 1982
Nortex Communications	1376, 1877, 1982	Ogden Telephone	1998, 2254, 3028, 3426, 3605
North American Communications	1376, 1877, 1982	Olin-Morley Telephone Company	1376, 1877, 1982
North Central Telephone	2302, 2345	Omni III Cable TV	1376, 1877, 1982
North Crossroads Communications	1376, 1877, 1982	OmniTel Communications	1376, 1877, 1982, 1998, 2254, 3028, 3426, 3605
North Dakota Telephone	2586	Oneida Cablevision	1376, 1877, 1982
North Eastern Penn Telephone	2302	OneLink	1376, 1877, 1982
North Frontenac Telephone Company	1998, 2254, 3028, 3426, 3605	OneSource Communications	1376
North Nova Cable	1877, 1982	Opelika Power Services	1998, 2254, 3028, 3426, 3605
North Star Cablevision	1376, 1877, 1982	OpenBand of Virginia	1998, 2254, 3028, 3426, 3605
		Opp Cablevision	1376, 1877, 1982
		Optic Communications	1376, 1877, 1982
		OptiLink	1877
		Optimum	3885, 1376
		Orbitel Communications	1376
		Oregon Cable Group	1376, 1877, 1982
		Orion Broadband	1376, 1877, 1982
		Orion Cablesystems	1376, 1877, 1982
		Osage Municipal Utilities	1376, 1877, 1982

Otec Communication	1376, 1877, 1982, 1998, 2254, 3028, 3426, 3605	Piedmont Cable Services	1376, 1877, 1982
OTEC Communications	2254, 2586	Pine Belt Communications	1376, 1877, 1982
Otelco	2302	Pine Bluff Cable	1376
OTZ Telecom	1998, 2254, 3028, 3426, 3605	Pine Island Telephone	1481, 1998, 2254, 2302, 2482, 3028
OTZ Telephone Cooperative Inc	1998, 2254, 3028, 3426, 3605	Pine River Cable	1376, 1877, 1982
Our Cable	1376, 1877, 1982	Pine Tree Cablevision	1376, 1877, 1982
Overton County Cable	1376, 1877, 1982	Pineland Telephone Cooperative	1898, 1481, 1615, 2254, 2586
Oxford Networks	1376, 1877, 1982	Pineville Communication Systems	2254
Ozarks Go	1998	Pinpoint Communications	1376, 1877, 1982
Ozona Cable & Broadband	1376, 1982	Pioneer	1877
Pace	1982, 1376, 1377, 1877, 3469, 3560, 1998, 0858, 6195, 4537, 5370	Pioneer Broadband	1376, 1877, 1982
Packerland Broadband	1376	Pioneer Cable	1376, 1877, 1982
Paleajook Cooperative	1376, 1877, 1982	Pioneer Communications	1376, 1877, 1982
Palmer Mutual Telephone	1376, 1877, 1982	Pioneer Long Distance	1898, 2302
Palmetto Rural Telephone Cooperative	0858	Pioneer Telephone	2254, 2302
Palo Cooperative Telephone Association	3426, 4437	Pitcairn Community Cable TV	1376, 1877, 1982
Panasonic	1982	Plant Communication	1376, 1877, 1982
Pangnirtung Cooperative	1376, 1877, 1982	Plantation Cable System	1376, 1877, 1982
Panhandle Telephone	1376	Plateau	3028
Panora Telecommunications	1481, 2482	Pleasant Vision	1376, 1877, 1982
Paragould Light & Water	1376, 1877, 1982	Polar Communications	2254, 2586
Parish Communications	1376, 1877, 1982	Polaris Cable	1376, 1877, 1982
Park Region Mutual Telephone	1481, 1998, 2302, 2345, 3028	Ponderosa Cablevision	1376, 1877, 1982
Park TV & Electronics	1376, 1877, 1982	Poplar Bluff Municipal Utilities	1481, 1998, 2302, 2482, 3028
Partner Communications	1376, 1877, 1982	Portal Cablevision	1376, 1877, 1982
Passcom Cable	1376, 1877, 1982	Post Cablevision	1376, 1877, 1982
Pathway Com-Tel	1376, 1877, 1982	Potelco	1998
Patterson Cable TV	1376, 1877, 1982	Pottawatomie Telephone Company	1998
Paul Bunyan Communications	2254, 2586	Premier Communications	1376
Paul Communications	1376, 1877	Price County Telephone	1481, 1998, 2254, 2302, 2482, 3028
PBT Cable Services	1376, 1877, 1982	Prime Cable Corporation	1376, 1877, 1982
PC One Cable	1376, 1877, 1982	Prime Time Cable	1376, 1877, 1982
PDQ Cable TV	1376, 1877, 1982	Princetown Cable	1376, 1877, 1982
PEC Cablevision	1376, 1877, 1982	Private Cable Systems	1376, 1877, 1982
Pegasus Communications	1376, 1877, 1982	Private Network Cable Systems	1376, 1877, 1982
Pembroke Advanced Communications	1998, 2254, 3028, 3426, 3605	Progressive Rural Telephone	1376, 1877, 1982
PennVideo Network	3560	Project Mutual Telephone	1481, 1898, 1998, 2302, 2482, 3028, 3605, 4437
Peoples CATV	1376, 1877, 1982	Project Services	1376, 1877, 1982
Peoples Rural Telephone Cooperative	1376	Provincial Cable	1376, 1982
Persona Communications	1376, 1877, 1982	PSC	1481, 1998, 2302, 2482, 3028
PES Energize	4437	PTCI	1376
Philippi Communications	1376, 1877, 1982	PVT Networks	1376, 1877, 1982
Philips	1377, 2619, 2378, 3560, 3469	Quadro Communications Cooperative	1376
Phoenix	1376	Quality Cable TV	1376, 1877, 1982, 2482
Phoenix Cable	1376, 1877, 1982	Quality One Technologies	1481, 1998, 2302, 2482, 3028
Phonoscope Communications	1376, 1877, 1982	QuantumVu	1376, 1877, 1982, 1998, 2254, 3028, 3426, 3605
Pickwick Cablevision	1376, 1877, 1982	Quinter Cable	1376, 1877, 1982
		Qwest	1377

R & R Cable	1376	Riverside Cablevision	1376, 1877, 1982
R Tec Communications	1376, 1877, 1982, 1998, 2254, 3028, 3426, 3605	Riviera Cable TV	1376, 1877, 1982
Raddiffe Telephone	1376, 1877, 1982	Robins Cable TV	1376, 1877, 1982
Raftview Communications	1376, 1877, 1982	Rock Port Cablevision	1376, 1877, 1982
Rainbow Cable	1376, 1877, 1982	Rockwell Cooperative Telephone Association	1376, 1877, 1982
Rainbow Communications	1376, 1877, 1982	Rocky Mountain Cable Systems	1376, 1877, 1982
Rainbow Lake Cable TV	1376, 1877, 1982	Rogers	1877, 1376, 5484, 2826, 3294, 4537
Rainier Connect	1376, 1877, 1982	Roome Telecommunications	1376, 1877, 1982
Ramapo Cable	1376, 1877, 1982	Royal Telephone	1376, 1877, 1982
Rancho Murieta Association	1376	Royal Telephone Company	1998, 2254, 3028, 3426, 3605, 1376, 1877, 1982
Randolph Communications	2254, 4437	RS Fiber	1998, 2254, 3028, 3426, 3605
Randolph Telephone	2254, 2586	RTC	1376, 1877, 1982
Rapid Communications	1376, 1877, 1982	RTEC Communications	1376, 1877, 1982
RC Communications	1376, 1877, 1982	RTI Telecom	1376
RC Technologies	1376, 1877, 1982	Runestone Telcom	1376, 1877, 1982
RCN	1376, 3560, 1877	Rural Route Video	1376, 1877, 1982
Reach Broadband	1376, 1877, 1982	Rural Telephone Company	1376
Readlyn Telephone	2586	RuralWave	1376, 1998, 2254, 3028, 3426, 3605
Rebeltec Communications	1376, 1877, 1982	RuralWest	1376, 1877, 1982
Red River Cable	1376, 1877, 1982	Russell Municipal Cable TV	1376, 1877, 1982
Red River Communications	1998, 2254, 3028, 3426, 3605, 1376, 1877, 1982	Russellville Electric Plant Board	2586
Reds Cable TV	1376, 1877, 1982	S & K TV Systems	1376, 1877, 1982
Regional Cable TV	1376, 1877, 1982	S & T Communications	1376, 1877, 1982
Reinbeck Telecommunications	1376, 1877, 1982	S-GO Video	1877, 1982
Reliance	1376, 1877	S. Bryer Cable TV	1376, 1877, 1982
Reliance Connects	1376, 1877, 1982	Sac County Mutual Telephone	1376, 1982
Relyant Communications	4437	Sagemcom	3885
Reservation Telephone	1376, 1998, 2345	Salem Cable Vision	1376, 1877, 1982
Reserve Long Distance	1376, 1877, 1982	Sallisaw Municipal Authority	1376, 1877, 1982
Resnet Communications	1376, 1877, 1982	Salsgiver Communications	1998, 2254, 3028, 3426, 3605
Resort Cable	1376	Samsung	1377, 1877, 1982, 2947, 3928, 6268
Reveille Broadband	1376, 1877, 1982	San Bruno Municipal Cable TV	1376, 1877, 1982
Revelstoke Cable	1376	San Carlos Cablevision	1376, 1877, 1982
Reynolds Cable	1376, 1877, 1982	San Juan Cable	1376, 1877, 1982
Reynolds Telephone Company	1998, 2254, 3028, 3426, 3605	San Simeon Community Cable	1376, 1877, 1982
RGA Cable	1376, 1877, 1982	Sand Creek Communications	1998, 2254, 3028, 3426, 3605
Richland Grant Telephone Cooperative	1376, 1877, 1982	Sandhill Telephone Coop	1998, 2254, 3028, 3426, 3605
Ridgeville Telephone Company	1376, 1877, 1982, 1998, 2254, 3028, 3426, 3605	Santa Rosa Telephone	1998, 2254, 3028, 3426, 3605
Ridgewood Cablevision	1376, 1877, 1982	Santel Comm Cooperative	1376, 1877, 1982
Ringgold Telephone	1376, 1877, 1982	SaskTel	1998
RingTel Communications	1376, 1877, 1982, 1998, 2254, 3028, 3426, 3605	Satco Cable TV	1376, 1877, 1982
Rio Virgin Telephone	1376, 1877, 1982	Satellite Cable Services	1376, 1877, 1982
Riondel Community Cable Society	1376, 1877, 1982	Satellite Operations	0775
Ripley Video Cable	1376, 1877, 1982	Satellite TV Systems	0775
Ritter Cable	1376, 1877, 1982	Satview Broadband	1376, 1877, 1982
River Road Cable	1376, 1877, 1982	Saugeen Telecable	1376, 1877, 1982
River Valley Cable TV	1376, 1877, 1982	Savage Communications	1376, 1877, 1982
River Valley Telecommunications	1481, 1998, 2254, 2302, 2482, 3028, 1376, 1877, 1982	Sayward Valley Communications	1376, 1877, 1982

Schindler Cable TV	1376, 1877, 1982	Sleepy Eye Telephone	2345
Schurz Communications	1376, 1982	Slic Network	3426, 4437
SCI Cable	1376, 1877, 1982	Small Town Cable	1376, 1877, 1982
Scientific Atlanta	1877, 0858, 1982, 2345, 3028, 2378, 2826	Smithville	2586
Scio Cablevision	1376, 1877, 1982	Socket TV	1898, 3426, 3605
Scott County Telephone Cooperative	1376, 1877, 1982	Sogetel	1998, 2482
Scott Telecom And Electronics	1376, 1877, 1982	Solarus	3028
Scottsboro Cable TV	1376, 1877, 1982	Somerfield Cable TV	1376, 1877, 1982
Scranton Telephone Company	1998, 2254, 3028, 3426, 3605	Source Cable	1376
Sea Island	1877	South Benton Cablevision	1376, 1877, 1982
Seaside Cable TV	1376, 1877, 1982	South Central Communications	1376, 1877, 1982
Seaview Communications	1376, 1877, 1982	South Central RTC	1951
SecureVision	1376, 1877, 1982	South Holt Cablevision	1376, 1877, 1982
SEI Robotics	1376	South Island Cable	1376
Selco	1376, 1877, 2826, 3560	South Kountry Cable	1376
Semo Communications	1376, 1877, 1982	South Slope Communications	1376, 1877, 1982
Senior TV	1376, 1877, 1982	Southeast Cable TV	1376, 1877, 1982
Service Electric	1376, 1982, 1877, 2187	Southeast Nebraska Communications	3605
Service One Cable	1376, 1877, 1982	Southern Cayuga County Cable	1376, 1877, 1982
Shannon Vision	1376, 1877, 1982	Southern Coastal Cable	1376, 1877, 1982
Sharon Telephone Company	1376, 1877, 1982, 0775	Southern Kansas Telephone	1376
Shaw	1376, 1982, 2187, 1877, 4537	Southern Montana Telephone	1998, 2254, 3028, 3426, 3605
Shaw Direct	0869	Southern Plains Cable	1376, 1877, 1982
Shawano Municipal Utilities	1376, 1877, 1982	Southern Vermont Cable	1376, 1982
Shellsburg Cablevision	1376, 1877, 1982	Southey Cable	1376, 1877, 1982
Shen-Heights TV	1376, 1877, 1982	Southside TV	1376, 1877, 1982
Shenandoah Cable	1376, 1877, 1982	Southwest MN Broadband	1376, 1877, 1982
Shenandoah Telecommunications	1376, 1877, 1982	Southwestern Bell Video Services	1376, 1877, 1982
Shentel	1376, 1877, 1982, 2187	Spanish Fork	1376, 1877, 1982
Sherburne Cable	1376, 1877, 1982	Sparklight	1376, 3560, 1877
Sherman Cablevision	1376, 1877, 1982	Spectrum	1877, 1376, 2187, 3560, 3294, 4537
Shrewsbury Electric & Cable	1376, 1877, 2826, 3560	Spencer Municipal Utilities	1376, 1877, 1982
Silver Star Communications	1481, 1998, 2302, 2482, 3028	Spillway Cablevision	1376, 1877, 1982
Simpson Country Cable TV	1376, 1877, 1982	Spirit Broadband	1376, 1877, 1982
Siren Telephone Company	1998, 2254, 3028, 3426, 3605	Spring City Cable	1376, 1877, 1982
Siskiyou Cablevision	1376, 1877, 1982	Spring Creek Cable	1376, 1877, 1982
Sister Lakes Cable	1376, 1877, 1982	Spring Grove Communications	2254
Sjoberg's Cable TV	1376	Springcom	1376, 1877, 1982
Skisat	1376, 1877, 1982	Springfield Cablevision	1376, 1877, 1982
SKT	1376, 1877, 1982	Springville Cable	1376, 1877, 1982
Sky Cablevision	1376, 1877, 1982	Spruce Knob Seneca Rocks Telephone	1998, 2254, 3028, 3426, 3605
Sky Mexico	3469, 2619, 1377	SRT Communications	1376, 1998
SkyBest TV	2586	ST	0775
SkyFiNet	1998, 2254, 3028, 3426, 3605	St. George Island Cable	1376, 1877, 1982
Skyline Cable	2254, 2586	St. John Cable	1376, 1877, 1982
SkyLine TMC	2586	Stanley Cablevision	1376, 1877, 1982
SkyPix	1481, 1998, 2302, 2482, 3028	Stanton Telecom	1376, 1877, 1982
Skyworth	1376	Star Cablevision	1376, 1877, 1982
		Star Choice	0869
		Star Communications	2254, 3426, 4437
		Starkville Cablevision	1376, 1877, 1982
		Starlight Communications	1376, 1877, 1982
		Starview Cable of Delaware	1376, 1877, 1982
		StarVision	1376, 1877, 1982
		Starwest	1376, 1877, 1982

Stellar Communications	1376, 1877, 1982	The Town of Mountain Village	
Stellar Private Cable Systems	1376, 1877, 1982	Cable	1376, 1877, 1982
Sterling Cable	1376, 1982	Thomson	1982, 3469, 2619, 1377
STMicroelectronics	0775	Three River Digital Cable	1376, 1877, 1982
Stowe Cablevision	1376, 1877, 1982	Throckmorton Cablevision	1376, 1877, 1982
Strata Networks	1376, 1877, 3560	TiftNet	1376, 1877, 1982
Strategic Technologies	1376, 1877, 1982	Time Warner	1877, 1376, 3294, 2187, 4537
Stratford Mutual Telephone	1376, 1982	Time Warner Cable	1877, 1376, 3294, 2187, 4537
Stubbs Communications	1376, 1877, 1982	Tip-Top Communications	1376, 1877, 1982
Suddenlink	1877, 1376, 3560, 3885, 1982	Titonka Burt Communications	2254
Summit Broadband	1376, 1877, 1982	TiVo	3560, 3724
Summit Communications	1376, 1877, 1982	Tobacco Valley Communications	
Sumner Cable TV	1376, 1877, 1982		1376, 1877, 1982
Sun Country Cable	1376	Tongue River Cable TV	1376, 1877, 1982
Sunrise Communications	1376, 1877, 1982	Topsham Communications	1898, 3605
Sunset Digital Communications		Total Cable Service	1376
	1998, 2254, 3028, 3426, 3605	Totalplay	4589
Superior Cable & Data	1376, 1877, 1982	Touchet Valley Television	1376, 1877, 1982
Supervision Cable TV	1376, 1877, 1982	Town of Imperial Cable Systems	
Surry Telephone	2254, 2586		1376, 1877
SWAT Cooperative	1481, 1998, 2302, 2482, 3028	Town of Mountain Village	1376, 1877, 1982
Swayzee Communications	1376, 1877, 1982	Toxaway Cable	1376, 1982
Sweetwater Cable TV	1376, 1877, 1982	Trans-Video	1376, 1877, 1982
Swiftel	2302, 3426, 3605, 4437	TransVision Cookshire	1376, 1877
Swisher Telephone	2345	Trappers Loop Communications	
Sycamore Telephone Company			1376, 1877, 1982
	1998, 2254, 3028, 3426, 3605	Trenton Cable	1376, 1877, 1982
TA Communications	1376, 1877, 1982	Tri-County Cable TV	1376
Taloga Cable	1376, 1877, 1982	Tri-County Communications	1376, 2254
TAT Cablevision	1376, 1877, 1982	Tri-County Telephone Association	2302
Tbaytel	1998	Triangle Communication System	
TCSI Huntsville	1376, 1877, 1982		0775
TCT	1376, 1877, 1982	TrioTel Communications	1376, 1877, 1982
TDS	1376, 1877, 1982	Troy Cablevision	1376
TDS Telecom	0775, 1376, 3028, 1877, 1982	Trust Cable TV	1376, 1877, 1982
Technicolor	1377, 1877, 1982, 5912, 2947, 5484, 3469, 6195	TruVista	1376, 1877, 1982
Tekstar Cablevision	1376, 1877, 1982	TSC Communications	2302
Tel-Star Cablevision	1376, 1877, 1982	Tuckersmith Communications	
Tele-Media	1376, 1877, 1982	Cooperative	1376, 3426, 3605
Tele-Services	1376, 1877, 1982	Tudjaat Cooperative	1376, 1877, 1982
TeleCable	1376	Tulalip Broadband	1376, 1877, 1982
Telecom Cable	1376, 1877, 1982	Tullahoma Utilities	2586
Telepak Networks	1376, 1877, 1982	Tulugak Cooperative	1376, 1877, 1982
TelePartners	1376, 1877, 1982	Turquoise Turtle TV	1376, 1877, 1982
Telephone de Courcelles	3605	Turtle Mountain	
Telerent Leasing Corporation	1376, 1877, 1982	Communications	1998, 2254, 3028, 3426, 3605
Telestar Systems	1376, 1877, 1982	TV Association of Republic	1376, 1877, 1982
Television Communications	0775	TV Cable Company of Andalusia	
Telsat Systems	1376, 1877, 1982		1376
TELUS	5912, 3028, 5942, 0775	TV Cable of Rensselaer	3560
Templeton Telephone	1376, 1877, 1982	TV Cable of Winamac	1376, 1877, 1982
Tesco Cable TV	1376, 1877, 1982	TV Northeast	1481, 1998, 2302, 2482, 3028
Texas Mid-Gulf Cablevision	1376	TV Service	1376, 1877, 1982
Thames Valley Communications		TVC	1376, 1877, 1982
	1376, 1877, 1982	TVision	1376, 1877, 1982
The Community Agency	1376	TVision Home	5370, 1998
		TVMAX	1376, 1877, 1982
		TVN	2254, 3605



TVS Cable	1376, 1877, 1982	Viola Home Telephone	1998, 2254, 3028, 3426, 3605
TWC	1877, 1376, 3294, 2187, 4537	Vision Communications	1376
Twin Lakes Communications	3426, 4437	Vision Systems	1376, 1982
Twin Valley Communications	2254, 2586	VisionComm	1376, 1877, 1982
Two Creeks Cable	1376, 1877, 1982	Vista III Media	1376, 1982
Télécâble St-Hilarion	1376, 1877	Vital Communications	1376, 1877, 1982
Téléphone de Lambton	1998	Viya	1376, 1877, 1982
Téléphone Saint-Éphrem	3605	VMedia	4596
Téléphone Upton	3605	VNET Fiber	1998, 2254, 3028, 3426, 3605
U-verse	0858	Vogtmann Engineering	1376, 1877, 1982
Ucluelet Video	1376, 1877, 1982	Volcano Vision	1376
Uintah Basin Electronic Telecom	1376, 1877, 1982	Voom	0869
UMBC	1376, 1877, 1982	VTel	3028
Union Telephone	1376, 1877, 1982	VTX Communications	2254, 3426
Unitah-Strata Networks	1376	Vyve Broadband	1376, 1982, 1877, 4079
United Communications	1376, 3426	W.D.B. Communications	1376, 1877, 1982
United Fiber	4437	Wabash Independent Networks	1376, 1877, 1982
United Satellite America	0775	Wabash Mutual Telephone Company	1615, 1898
United States Gypsum	1376, 1877, 1982	Wadsworth Cable TV	1376
United States Wireless	0775	Waitsfield Cable	1376
United Telephone	1376, 2254, 2586	Walnut Communications	1376, 1982
Universal Cablevision	1376, 1877, 1982	Walnut Grove Cable TV	1376, 1877, 1982
Universal Satellite Cable	1376, 1877, 1982	Ward Communications	1376, 1877, 1982
Upper Peninsula Communications	1376, 1877, 1982	Warwick Valley Telephone	1376, 1877, 1982
US Online	1376, 1877, 1982	Washington Cable	3560
US Sonet	1376, 1877, 1982	Washington County Rural Telephone Cooperative	1376, 1877, 1982
USA Cablesystems	1376, 1877, 1982	Watch TV	1481, 1998, 2302, 2482, 3028
USA Communications	1376	Waterville Cable TV	0775, 1376, 1877, 1982
USA Companies	1376, 1877, 1982	Watson Cable	1376, 1877, 1982
USA Wireless Satellite TV	0775	Wave Broadband	1376, 1877, 4079, 2479, 3560, 2187
Utica Cablevision	1376, 1877, 1982	Wave Wireless	1376, 1877, 1982
Utilities Board City of Foley	1376	Waverly Communications Utility	3426
Utility Systems Development	1376, 1877, 1982	WC Tel	3028
Uwharrie Communications	2254, 2586	WCTA	1376, 1877, 1982
Valley Cable & Satellite Communications	1376, 1877, 1982	Webster-Calhoun Cooperative Telephone Association	2254
Valley Cable TV	1376, 1877, 1982	WEHCO Video	1376
Valley Telecom	2302, 2482	Weiss Lake Cable	1376, 1877
Valparaiso Communications	1376	Wellman Cooperative Telephone Association	3605
ValuNet Fiber	3605	West Alabama TV Cable	1376, 1877, 1982
Van Horne Cablevision	1376, 1877, 1982	West Carolina Telephone	3028
Vast Broadband	1877, 1376	West Central Telephone	1376, 1877, 1982
Vaughnsville Communications	1998, 2254, 3028, 3426, 3605	West Lake Cablevision	1376, 1877, 1982
Venture Communications Cooperative	1481, 1998, 2302, 2482, 3028	West River Cable Television	1376, 1877, 1982
Venus Telephone Cooperative	1376, 1898	West-Tex Telecommunications	1998, 2254, 3028, 3426, 3605
Veracity Communications	1376, 1877, 1982	WesTel Systems	1376, 1877, 1982
Verizon	2378	Western Broadband	1376, 1877, 1982
Verneau Networks	1998, 2254, 3028, 3426, 3605	Western Cable Service	1376, 1877, 1982
Vernon Telephone Cooperative	2586	Western Iowa Networks	1376, 1877, 1982
Vianet TV	1898, 3605, 3118	Western Iowa Telecom	1376, 1877, 1982
Vicksburg Video	1376	Western Iowa Telephone	1877
Vidia Communications	1376, 1877, 1982		
Vidion Cable	1376, 1877, 1982		
Vidéotron	2947, 1877, 1376		
Village Cable	1376, 1982		
Viola Communications	1376, 1877, 1982		

Western Montana CommunityTel	1376, 1982
Western Telephone Company	1376, 1877, 1982
Western Wisconsin Communications	1376, 2586
WestTex Telephone Cooperative	1998, 2254, 3028, 3426, 3605
Westman Communications	1376, 2187
Westpa.net	1376, 1877, 1982
Westphalia Broadband	2254, 2586
Wetherell Satellite Cable TV	1376, 1877, 1982
WFL Cable Television	1376, 1877, 1982
Wheat State Telephone	3426, 3605, 4437
Whidbey Telecom	1998
White County Video	1376
WiaTel	1877
WiConnect Wireless	1376, 1877, 1982
WideOpenWest	1376, 2187
Wightman	1898, 3426, 4437
Wikstrom Systems	1376, 1877, 1982
Wilco Electronic Systems	1376, 1877, 1982
Wilcop Cable	1376, 1877, 1982
Wilkes Telecommunications	1481, 1998, 2302, 2482, 3028
Willamette Broadband	1376
Williamstown Cable	1376, 3560
Windbreak Cable TV	1376, 1877, 1982
Windjammer Cable	1376, 1877
Windstream	1376, 1982, 0775
Winslow Communications	1376, 1877, 1982
Wire Tele-View	1376, 1877, 1982
Wireless One	1376, 1877, 1982
Wistron NeWeb	3118, 6268
Wittenberg Telephone	1376, 1877, 1982
WK&T Telecommunications	2254, 2302
Wood County Telephone	1376, 1877, 1982
Woodsfield Municipal Cable	1376, 1877, 1982
World Satellite Cable Systems	0775
Worth Cable TV	1376, 1877, 1982
WOW!	1877, 1376, 2187, 2479, 3560, 2826, 3294
WT Services	1376, 1877, 1982
WTC Communications	1376, 1877, 1982, 1998
WTCI Cable	1376, 1877, 1982
Wyandotte Municipal	1376, 1982
Xfinity	1982, 1376, 1877, 3560, 2187, 4079, 4443, 4537
XIT Communications	2302
Xittel Telecommunications	3605
Xtream	1376, 3560, 1982, 1877
Yadkin Valley Telecom	2345
Yadtel Telecom	4437
Ycom Networks	1376, 1877, 1982

Yelcot Video Group	1376, 1877, 1982
Yelo	1376
Ygnition	1376, 1877, 1982
Yondoo	3426
Youngsville TV	1376, 1877, 1982
Yucca Telecom	1998, 2254, 3028, 3426, 3605
Zampelli Electronics	1376, 1877, 1982
Zazeen	3426, 3118
Zenith	3469
Zito Media	1376, 1877, 1982
Zoom Media	1376, 1877, 1982

## AUDIO SOUNDBAR

Acoustic Audio	4683
Aiwa	0158
Altec Lansing	4609
AMC	1077
Apex Digital	4334
Arcam	2241
AudioSource	3721
Aura	4293
Axess	4095
Axiim	4951
Bestisan	5271
Bose	1933, 1629, 3959, 4307, 3708, 4024, 3706, 3832
Boston Acoustics	3698
BÖHM	4280
Coby	3654
Craig	4466
Curtis	3942
Definitive Technology	4415, 3645, 4984
Denon	2857, 3347, 2516, 3380, 2502, 4025
Dynavox	3231
Dynex	2971, 3951
Emotiva	3763
Enclave Audio	4800
Epworth	0158
Focal	4021
Gateway	1567
GE	3297
General Electric	3297
Haier	3516
Harman/Kardon	2241, 0110, 1304, 2443, 3418, 4186, 3756, 3320, 3517, 3391
iLive	3175
Inkel	3770, 4090, 3793
Insignia	3951, 2472, 2169, 2966, 3770, 4424, 1077
Integra	1805, 3860, 2730, 4023, 4014, 2503, 3992
JBL	3756, 2241, 3391, 3535, 5132, 0110
JVC	1676, 2040, 2331, 3049
Kenwood	1570, 1293
Klipsch	4941, 4198, 4200

LG	2676, 2197, 3509, 3217, 3996, 4043, 1293
Logitech	1408
Magnavox	1831, 1269, 3282
Marantz	1289, 2114, 3772, 3347, 1269
Martin Logan	3526
McIntosh	1289
Megacra	5271
Monoprice	4505
Monster Cable	4987
Onkyo	1805, 2730, 3860, 4023, 2503, 4041, 4014, 3984, 3992, 5094
Onn	5042, 5041, 5412, 5414, 5415, 5416, 5043
Optimus	1023
Panasonic	2967, 3309, 3323, 3055, 2452, 3767, 1676
Paradigm	4536, 3526, 4846
Philco	1831
Philips	1269, 1831, 2459, 4105, 3379, 2311, 3776, 3652, 3801, 3282, 2675, 4012
Pinnacle Speakers	3774, 3728
Pioneer	1935, 3057, 2432, 1023, 3956
Polk Audio	1289, 4431
Proficient	3661
Pyle	4333
RCA	2041, 2611, 3297, 2719, 2655, 3969, 1023, 2544
Samsung	2660, 1868, 2809, 3320, 3382, 3154, 2137, 1304
Samsung Harman/Kardon	3320
Sanyo	4176, 3282
Sharp	3736, 3097, 3929
Sherbourn	3763
Sherwood	1077, 1567, 3136, 3120, 2169, 3793, 4090, 3770
Sherwood Newcastle	1567, 2169
Sonos	3919
Sony	0158, 1622, 1759, 2172, 2475, 1822, 2522, 1758, 3700, 4315, 3257, 2582, 3487, 4366, 2610, 4457, 4285
SpeakerCraft	3661
Sungpo	3736, 3097, 3929
TaoTronics	4672
TCL	4672
Toshiba	3627
VIZIO	2454, 3935, 5095, 4911
Wards	0158

Yamaha	0176, 3580, 2467, 3030, 2116, 2458, 3325, 3917, 4269, 2021
Zenith	1293, 2197
ZVOX	2332, 3913, 2334

## BLURAY DVD

Accurian	0675
Akai	0675
Bel Canto Design	1571
California Audio Labs	0490
Cambridge Audio	2808
Citizen	2213
Coby	2494
Contel	2331
Curtis	3052
Curtis Mathes	2331
Denon	1634, 2258, 0490, 2748, 3851
Digix	2464, 3850
Disney	0675
Durabrand	0675, 3464
Dynex	2596
Emerson	0675, 2213
Funai	0675
GE	0522
General Electric	0522
GFM	0675
Go Video	1075, 0741
Goldmund	2545
GoldStar	0741
Grundig	0539
Harman/Kardon	3228, 2927
Hitachi	0573, 0675
Insignia	2095, 2596, 2428, 0675, 0741
Integra	0627, 2147, 1769, 1634, 3787
JVC	0623, 1550, 1602, 2365, 2855
Kenwood	0534, 0490
LG	0741, 1602, 4091
Magnavox	0675, 3488, 0503, 0539
Marantz	2481, 0539, 2414, 3444
Memorex	2213, 3031, 2331
Microsoft	0522
NAD	0741
New Acoustic Dimension	0741
Ölevia	2331
Onkyo	0627, 2147, 0503, 1769, 2562, 3787
Onn	4016, 4371, 4377
Oppo	2545
Panasonic	0490, 1641, 1579, 3641, 0503
Philco	0675
Philips	2434, 2056, 2789, 0675, 0539, 3488, 0503, 3274, 2084
Philips Magnavox	0503, 0675

Pioneer	1571, 2854, 2442, 0142, 2847
Polk Audio	0539
Presidian	0675
Proscan	0522
RCA	0522, 2213, 2532, 3464, 1769
Rotel	0623
Samsung	0199, 0573, 1075, 1573, 2069, 2113, 2843, 2329, 2269, 2556, 4108, 0490
Sanyo	0675
Seiki	2912
Sharp	2250, 0675, 2652
Sherwood	0741, 3052, 3837
Sony	1633, 1516, 1033, 1070, 0864, 4009
Sungpo	2250, 0675, 2652
SV2000	0675
Sylvania	0675
Symphonic	0675
Technics	0490
Toshiba	0503, 2277, 2006, 3857, 1769, 3157, 3957
VIZIO	2563
Yamaha	0539, 2298, 0490, 3320, 3995, 3837
Zenith	0741, 0503

Need help? We here for you every day from 7 a.m. – 9 p.m. CST  
Give us a call at 1-888-516-2630

Please visit the website [www.onn-support.com](http://www.onn-support.com)

Distributed by Walmart Inc., Bentonville, AR 72716

Made in China

RDN1010321